



Commercial Kitchen Equipment Parts

HOBART AMTL

Hobart AMTL document


Provided by PartHubz

parthubz.com

833-700-8006 | support@parthubz.com



Project _____
AIA # _____ SIS # _____
Item # _____ Quantity _____ C.S.I. Section 114000



AMTL TWO LEVEL ELECTRIC

High Temperature Door-Style Dishwashing Machine



SPECIFIER STATEMENT

Specified unit will be a Hobart AMTL electric high temperature two-level dishwashing machine. Features include two wash chambers with separate pumped rinse systems, pillar less 5-sided insulated hood, touchscreen controls with WiFi connectivity, NSF pot and pan rating for 2-, 4- & 6-minute cycles (upper chamber), Extended/utensil wash cycles (lower chamber), 17" (432 mm) door opening (upper chamber), 8 $\frac{3}{8}$ " (225 mm) door opening (lower chamber), pumped drain, auto door start with auto fill & AutoClean, interchangeable stainless steel wash and rinse arms (upper chamber), snap-in rinse arm (lower chamber), delime notification and cycle, advanced diagnostics and service connection, up to 80 racks per hour, .62 U.S. gallons/2.3 L per rack (upper chamber), .62 U.S. gallons/2.3 L per rack (lower chamber).

1 year parts and labor warranty.

STANDARD FEATURES

- + Independent wash chambers with separate pumped rinse systems
- + **Upper Chamber:** .62 gallons (2.3 L) per rack pumped final rinse
- + **Lower Chamber:** .62 gallons (2.3 L) per rack pumped final rinse
- + 80 racks per hour – hot water sanitizing
- + Multiple cycle operations including a utensil cycle on the lower chamber
- + 17" (432 mm) upper chamber door opening
- + 8 $\frac{3}{8}$ " (225 mm) lower chamber door opening will accept 7" (178 mm) plates
- + User-friendly smart touchscreen controls
- + WiFi connectivity and Hobart Smart Connect app
- + Two stage filtration
- + Pillar less opening
- + 5-sided insulated hood
- + Lower insulated door
- + Single point electrical connection standard, field convertible to dual point connection
- + 3 phase standard, field convertible to single phase
- + Temperature lockouts
- + Pumped drain
- + Timed wash cycles for 1, 2, 4 or 6 minutes (lower chamber – utensil cycle for 3 and 6 minutes)
- + **Upper Chamber:** NSF pot and pan rating for 2-, 4- & 6- minute cycles
- + Sense-A-Temp™ 60°F (33°C) rise electric booster heater
- + Self-draining, high efficiency wash pump with stainless steel impeller
- + Stainless steel drawn tank, tank shelf, chamber, trim panels, frame and feet
- + Spring counterbalanced chamber with thermo-plastic rollers
- + **Upper Chamber:** Revolving, interchangeable upper and lower anti-clogging wash arms
- + **Upper Chamber:** Revolving, interchangeable upper and lower rinse arms
- + **Lower Chamber:** Snap-in revolving lower wash and rinse arm
- + Slanted, self-locating, one-piece scrap screen and basket system
- + 120°F (49°C) incoming water required
- + Automatic fill
- + Door actuated start
- + AutoClean
- + Vent fan control
- + Factory startup
- + USB connection for service diagnostics
- + Straight-through installation only
- + Delime cycle with notification (field activated)

OPTIONS & ACCESSORIES (Available at extra cost)

- ☐ Peg Rack
- ☐ Combination rack
- ☐ Drain water tempering kit
- ☐ Water softener
- ☐ Flanged and seismic feet
- ☐ End of cycle audible alarm (field activated)
- ☐ Water hammer arrestor kit
- ☐ Fold down table

AMTL SERIES – AMTL TWO LEVEL ELECTRIC


Approved by _____ Date _____ Approved by _____ Date _____




AMTL TWO LEVEL ELECTRIC

High Temperature
Door-Style Dishwashing Machine


Primary Dimensions in US Inches (secondary in millimeters)

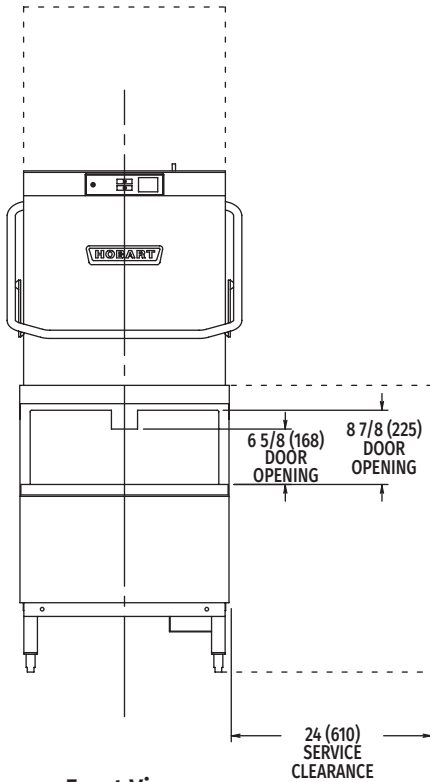


Front View

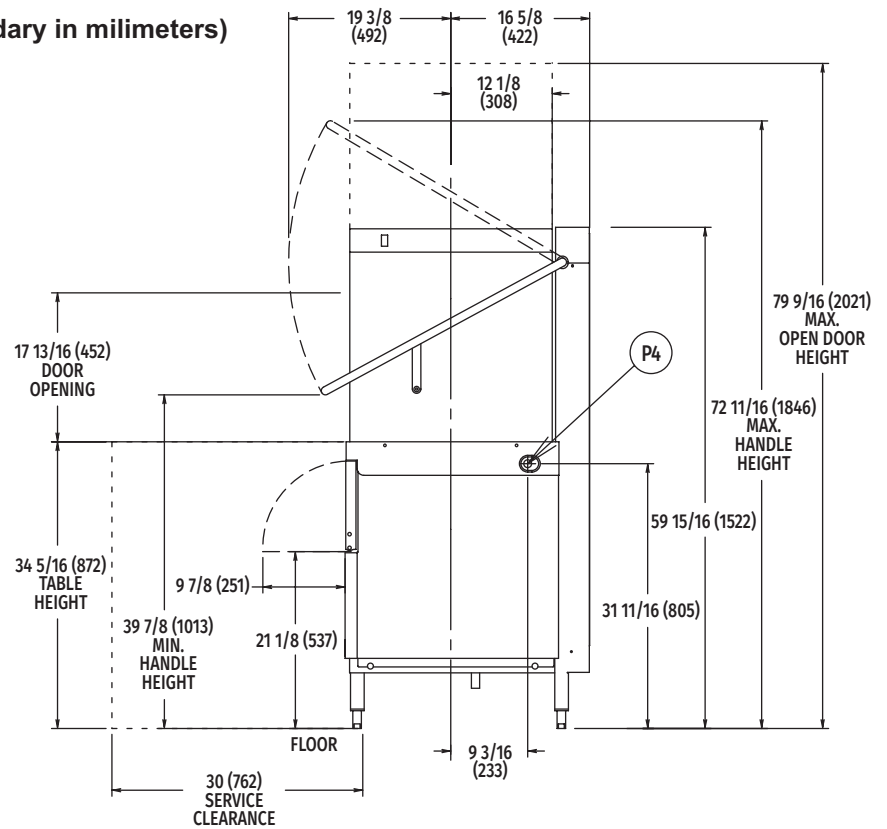

Right Side View

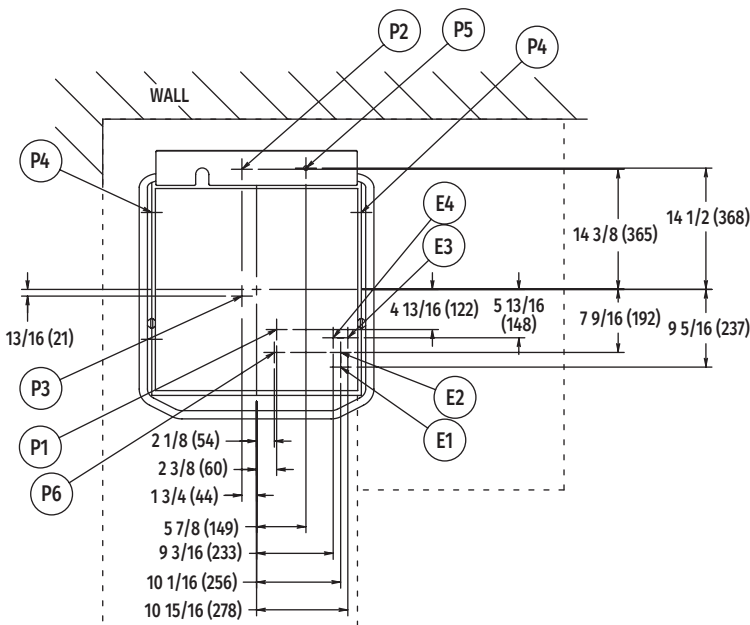

Top View

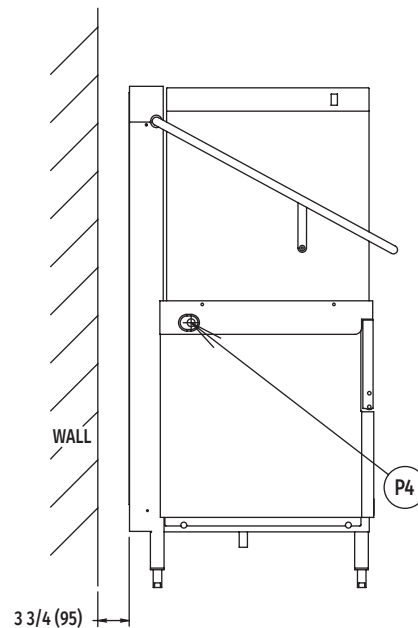

Left Side View


MODEL:
AM-TL
00-950444




AMTL TWO LEVEL ELECTRIC

High Temperature Door-Style Dishwashing Machine

WARNING: Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary, safety codes and National Electrical Code.

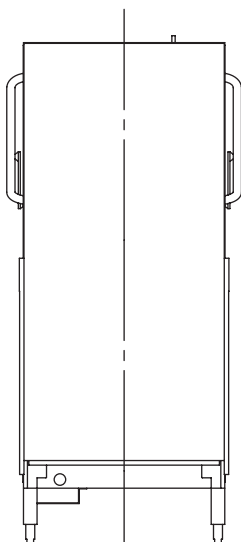

Rear View

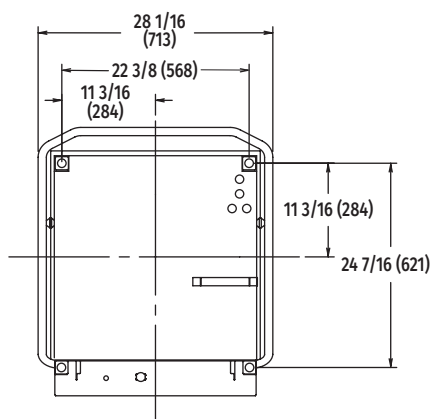

Bottom View

LEGEND

Electrical Connections	
E1	Electrical connection: wash pump motor & sump heater, 1" or 3/4" (25 or 19 mm) conduit hole; 6-11/16" (170 mm) AFF.
E2	Electrical connection: electric booster & controls only or single point electrical connection (3PH only), 1" or 3/4" (25 or 19 mm) conduit hole; 6-11/16" (170 mm) AFF.
E3	Electrical connection: detergent & rinse agent feeders, (DPS1 & DPS2) 1.5 amps @ nameplate supply voltage, (RPS1 & RPS2) 1.5 amps @ nameplate supply voltage; 1/2" (13 mm) conduit hole, 6-11/16" (170 mm) AFF.
E4	Electrical connection: vent fan control (VFC1 & VFC2) switching circuit only 1.5 amps @ nameplate supply voltage; 1/2" (13 mm) conduit hole, 6-11/16" (170 mm) AFF.
Plumbing Connections	
P1	Common water connection including booster heater: 120° F (49°C) water minimum; 15-65 PSI (103-448 kPa) recommended, 3/4" (19 mm) female garden hose fitting on 6' (1829 mm) long hose supplied with machine; 7-11/16" (195 mm) AFF.
P2	Drain connection: 5/8" (16 mm) barb fitting with 6.5' (1981 mm) long hose supplied with machine; 6-11/16" (170 mm) AFF. Maximum height 40" (1016 mm) AFF.
P3	Detergent probe sensor: remove cap and stud assembly to access 7/8" (22 mm) hole; 11-1/2" (292 mm) AFF.
P4	Detergent feeder: two locations available; remove cap and stud assembly to access 7/8" (22 mm) hole; 31-11/16" (805 mm) AFF.
P5	Rinse agent feeder: remove 1/8" (3,2 mm) NPT pipe plug to access 1/8" (3,2 mm) NPT tapped hole; 60-3/4" (1543 mm) AFF.
P6	Cold water connection: 55° F (13°C) water minimum (drain water tempering accessory - when ordered); 3/4" (19 mm) female garden hose fitting on 8' (2438 mm) long hose; 7-11/16" (195 mm) AFF.

SPECIFICATIONS

Capacities

Racks Per Hour (maximum)	80
Dishes per Hour (average 25 per rack)	2,000
Glasses per Hour (average 45 per rack)	3,600
Wash Tank (U.S. gallons/Liters)	7.9/30

Motor Horsepower (Watts)

Rinse Pumps (2)	0.18 (134)
Wash Pump	2 (1492)
Drain Pump	0.21 (157)

Rinse

Gallons (L) per Rack Upper Chamber	0.62 (2,3)
Gallons (L) per Rack Lower Chamber	0.62 (2,3)
Gallons (L) per Hour (maximum consumption)	49.6 (188)

Peak Rate of Drain Flow

Gallons (L) per Minute (initial rate with full tank)	11 (42)
--	---------

Heating

Electric Booster (kW)	12.2
Electric Tank Heating Unit (kW)	9

Exhaust Requirements 450 CFM (12.7 M³)

Shipping Weight (approximate) 555 lbs. (252 kg)

Crated Dimensions 35.4"L x 39.4"W x 70.9"H (899 x 1000 x 1800 mm)



AMTL TWO LEVEL ELECTRIC

High Temperature Door-Style Dishwashing Machine

E1	AMTL with Electric Sump Heat (When Field Converted to Dual Point)		
Voltage	Rated Amps	Minimum Supply Circuit Ampacity	Maximum Protective Device
208-240/60/1	37.7	50	50
208-240/60/3	21.7	25	25

E2	12.2 kW Electric Booster & Controls (When Field Converted to Dual Point)		
Voltage	Rated Amps	Minimum Supply Circuit Ampacity	Maximum Protective Device
208-240/60/1	54.5	60	60
208-240/60/3	32.9	40	40

E2	AMTL Single Point Electrical Service Connection as Shown Below		
Voltage	Rated Amps	Minimum Supply Circuit Ampacity	Maximum Protective Device
208-240/60/3	54.9	60	60

Approximate Heat Gain to Space without Vent Hood	
Type	BTU/Hr.
Latent	9,600
Sensible	4,900

Plumbing Notes: Water hammer arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.

Recommended water hardness to be 3 grains (51.3 ppm) or less for best results.

Recommended building flowing water pressure to the dishwasher is 15-65 PSI (103-448 kPa). Pressures lower than 15 PSI (103.4 kPa) may affect machine fill/start-up times.

This is a pumped rinse machine. Pressure regulating valve is recommended if pressure is higher than 65 PSI/448 kPa (supplied by others).

For convenience when cleaning, water tap should be installed near machine with heavy duty hose and squeeze valve.


Miscellaneous Notes: All dimensions taken from floor line may increase 5/16" (8 mm) or decrease 15/16" (24 mm) depending on leg adjustment.

Vent hood (if required) to provide a minimum 450 CFM (12.7 M³) exhaust (ref installation instructions).

Net weight of machine including booster: 305 lbs (138 kg).


Domestic shipping weight including booster: 555 lbs (252 kg).

Size of racks – 19³/₄" x 19³/₄" (502 x 502 mm).

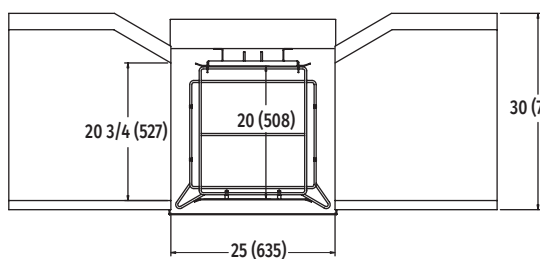


Pass Thru Installation

Top Inside View of Machine

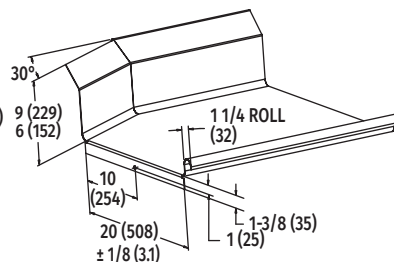

Suggested Table Design

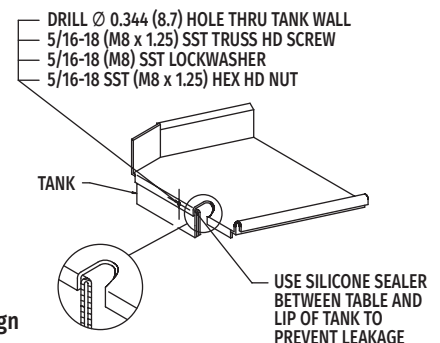



Commercial Kitchen Equipment Parts

Find more Hobart equipment resources at

parthubz.com/equipment/hobart

Need parts or service?

Call 833-700-8006

support@parthubz.com

parthubz.com