Commercial Kitchen Equipment Parts

HOBART CL64-DWR

Hobart CL64-DWR Specification Sheet

Provided by PartHubz

parthubz.com

833-700-8006 | support@parthubz.com

HOBART

Project _____

AIA #_____ SIS #_____


Item #_____ Quantity _____ C.S.I. Section 114000

COMMERCIAL DISHWASHERS

CL SERIES – CL64-DWR ELECTRIC

CL64-DWR ELECTRIC

High Temperature Rack Conveyor Dishwashing Machine

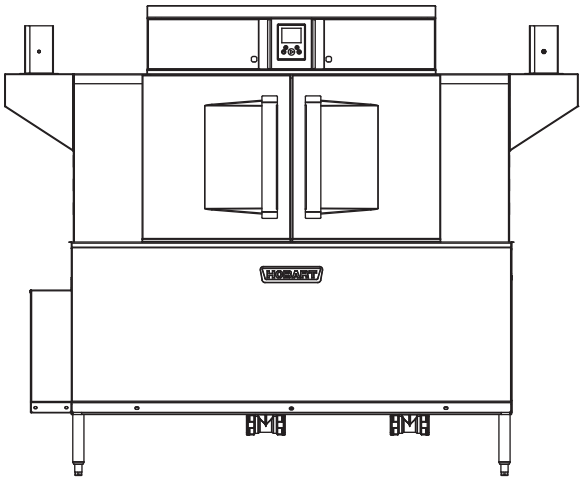

c UL us NSF ENERGY STAR

SPECIFIER STATEMENT

Specified dishwasher will be Hobart CL64 Drain Water Energy Recovery electric tank heat model. Features include Drain Water Energy Recovery (DWER), Complete Delime™ with Delime Notification, Auto Dispensing and Booster Guard™, capless anti-clogging wash arms, 342 racks per hour, 114 gallons per hour pumped final rinse, ENERGY STAR® (pending), insulated ergonomic cabinet style doors, touchscreen controls with WiFi connectivity, and NSF approved pot and pan cycle mode. The wash tank utilizes durable precision pressure sensor monitors in lieu of conventional mechanical floats. The 19.5" standard chamber height will accommodate up to (6) standard sheet pans at a time on an open-end sheet pan rack.

STANDARD FEATURES


+ 114 gallons per hour pumped final rinse
+ 342 racks per hour
+ Drain Water Energy Recovery (DWER)
+ Drain water tempering kit (factory installed)
+ ENERGY STAR® Certified (Pending)
+ Complete Delime™ with Delime Notification, Auto Dispensing and Booster Guard™
+ Internal stainless steel pressure-less 24 kW booster heater (70°F rise)
  — Single point electrical connection standard
+ Capless, anti-clogging wash arms
+ Large double door opening for ease of cleaning
+ 19.5" chamber height opening (accepts sheet pans)
+ Doors are insulated & hinged with door interlock switches
+ User-friendly smart touchscreen controls with diagnostics & troubleshooting
+ WiFi connectivity
+ SmartConnect app and cloud with machine status, temperature logs, error code reporting, and cost, consumption and usage analysis
+ Energy saver mode (programmable auto-shut down)
+ NSF rated configurable pot and pan cycle
+ Self-aligning wash manifolds
+ Stainless steel self-draining pump and impeller
+ Sloping scrap screens and deep scrap baskets
+ Rapid return conveyor drive mechanism
+ Service diagnostics
+ Door actuated drain closure
+ Vent fan control

OPTIONS & ACCESSORIES (Available at extra cost)


❑ Standard, short, and extended stainless steel vent hoods
❑ Direct drive unloader – adds 38" length; Reference spec F48944 for more details
❑ Side loader – SL23 adds 23" length, SL30 adds 30" length; Reference specs F40926 and F40927 for more details
❑ Blower-dryer – adds 33⅛" to length; Reference spec F48945 (electric blower-dryer) and F48950 (steam blower-dryer) for more details (ships separate from dishmachine, contact Hobart Service for installation)
❑ Flanged feet kit (requires two kits)
❑ Higher than standard chamber (24" opening)
❑ Table limit switch with 20' cable
❑ Correctional package (factory installed, contact Hobart for details)
❑ Water hammer arrester
❑ Factory-mounted circuit breakers (contact Hobart for details)

Approved by_____ Date_____ Approved by_____ Date_____


CL64-DWR ELECTRIC
High Temperature Rack Conveyor Dishwashing Machine

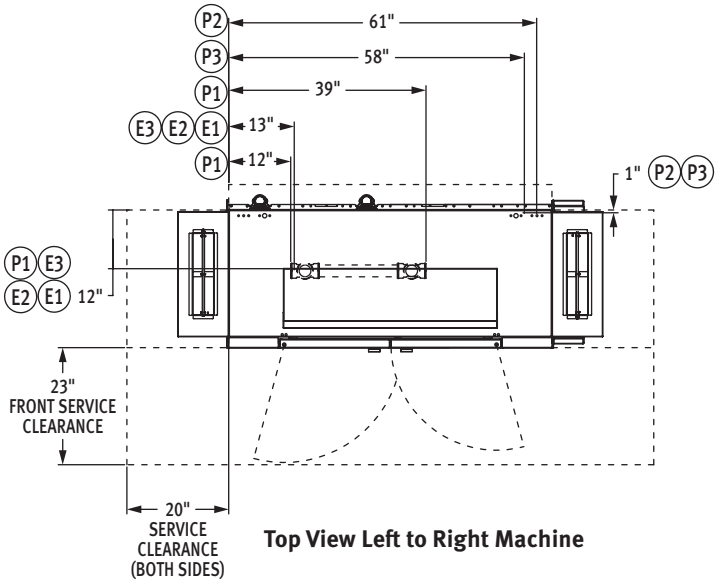


Top View Left to Right Machine

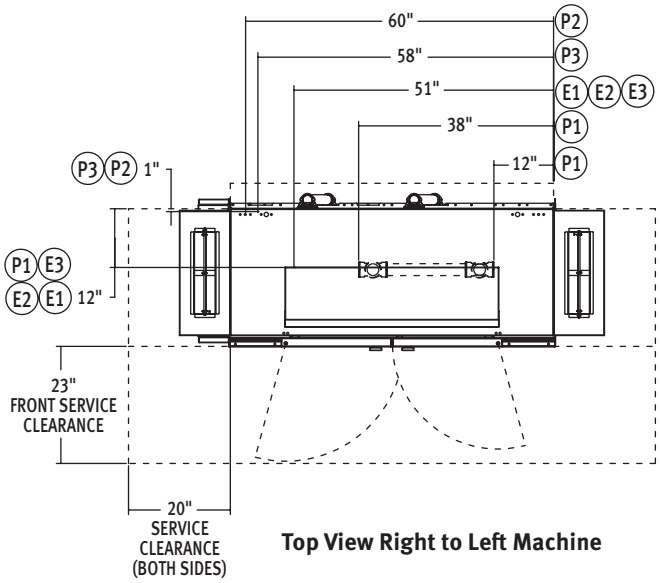


Top View Right to Left Machine

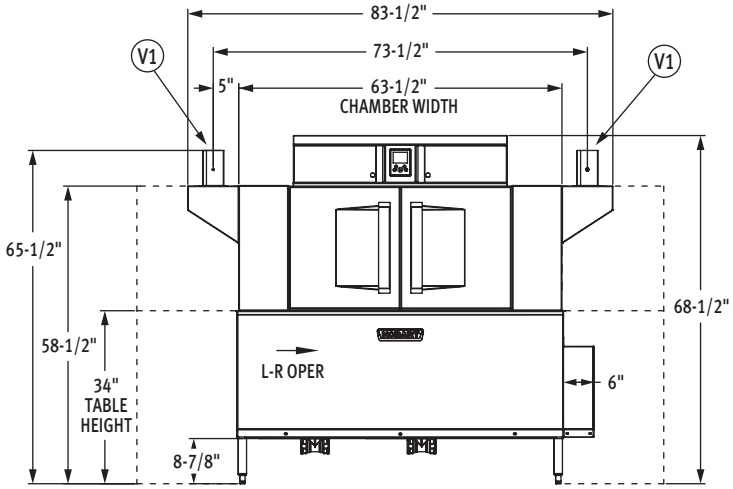

Front View Left to Right Machine

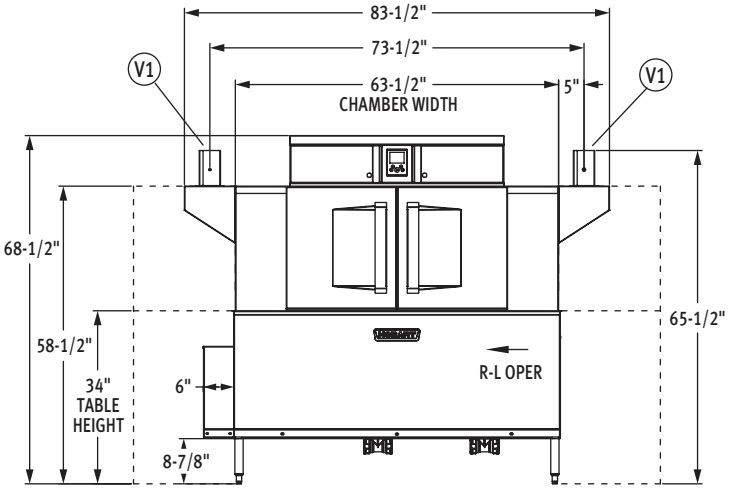

Front View Right to Left Machine

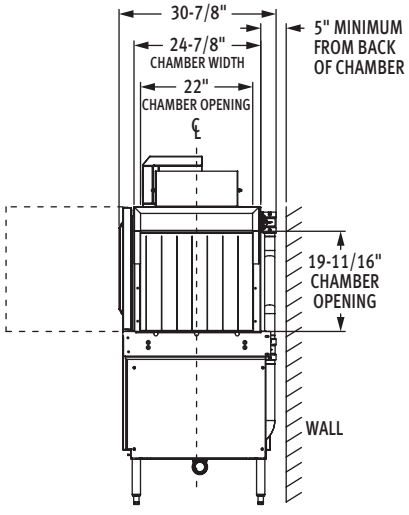

Side View

MODEL:
CL64-DWR ELECTRIC
L-R OPERATION
00-563922
REV A

MODEL:
CL64-DWR ELECTRIC
R-L OPERATION
00-563932
REV A

CAD and/or Revit Files Available

CL64-DWR ELECTRIC
High Temperature Rack Conveyor Dishwashing Machine

LEGEND

Electrical Connections	
SINGLE POINT CONNECTION	
E1	Electric connection, single point: motors, controls, tank heat, with 24kW electric booster heater, 65" AFF.
DUAL POINT CONNECTION WITH BOOSTER	
E2	Electric connection: motors, tank heat, 62" AFF.
E3	Electric connection: controls, 24kW booster heater, 65" AFF.
Plumbing Connections	
P1	Drain: 2" FPT, 7-3/8" AFF, two possible connections; may be drained to either side of drain housing, plug opposite side.
P2	Hot water connection: 1/2" FPT, 12" AFF, 24kW booster, 110°F minimum.
P3	Cold water connection: 1/2" FPT, 12" AFF, 55°F minimum, 80°F maximum.
Vent Connections	
V1	Optional vent hoods: 4" x 16" vent stack with damper. Load end 200 CFM, unload end 400 CFM.

SPECIFICATIONS

Capacities

- Racks per Hour (NSF rated) 342
- Wash Tank (U.S. gallons) 23
- Power Rinse Tank (U.S. gallons) 22
- Conveyor Speed (feet per minute) 9.5

Motor Horsepower

- Drive 1/6
- Wash 2
- Power Rinse 2
- Final Rinse 2/3
- Drain Water Energy Recovery 1/5

Water Consumption

- U.S. Gallons per Hour 114
- U.S. Gallons per Rack 0.33
- Peak Drain Flow (U.S. gallons per minute) 38

Heating

- Tank Heat, Electric (kW) 25
- Electric Booster (built-in) (kW for 70°F rise) 24

Venting

- Load End (minimum CFM) 200
- Unload End (minimum CFM) 400

Shipping Weight (approximate) . . . . . .870 lbs.

Crated Dimensions . . . . . 74"L x 38"W x 79"H

E1	Single Point Electrical Connection with Internal Booster	
Voltage	(E1) Motors, Controls, Tank Heat, 24kW Booster Heater	
	Rated Amps	Minimum Supply Circuit Ampacity/ Maximum Protective Device
208/60/3	162.3	300
240/60/3	148.5	175
480/60/3	76.3	90
600/60/3	58.8	70

E2 E3	Dual Point Electrical Connection with Internal Booster (Field Conversion Only)			
Voltage	(E2) Motors, Tank Heat		(E3) Controls, 24kW Booster Heater	
	Rated Amps	Minimum Supply Circuit Ampacity/ Maximum Protective Device	Rated Amps	Minimum Supply Circuit Ampacity/ Maximum Protective Device
208/60/3	87.2	110	75.1	90
240/60/3	82.3	100	66.2	80
480/60/3	41.8	50	34.5	40
600/60/3	30.6	40	28.2	35

WARNING: Electrical and grounding connections must comply with the applicable portions of the National Electrical Code and/or other local electrical codes.

CAUTION: Certain materials including silver, aluminum, and pewter are attacked by sodium hypochlorite (liquid bleach).

ATTN: Plumbing connections must comply with applicable sanitary, safety and plumbing codes.

CL64-DWR ELECTRIC
High Temperature Rack Conveyor Dishwashing Machine

Plumbing Notes: Water hammer arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.

Recommended water hardness to be 3 grains or less for best results.

110°F minimum incoming hot water temperature.

Building flowing water pressure to dish machine is 20 to 65 PSI at the machine.

For convenience when cleaning, water tap should be installed near machine with heavy duty hose and squeeze valve.

Miscellaneous Notes: All dimensions taken from floor line may be increased approximately 3/4" or decreased 1/2".

For HTS, add 4-5/16" to all dimensions above table line.

For HTS, add 15 lbs. to the domestic shipping weight of each model.


Electrical Note: Dishmachine not provided with internal GFCI protection.

CL64-DWR Electric Heat Dissipation		
Booster	BTU/HR.	
	Latent	Sensible
24kW Booster	47,200	20,200


NOTE: Additional Voltages and Amperages are available, see document F48913.

VENT HOOD OPTIONS (Adjustable, vent stack can be adjusted 1" to either side)

Standard

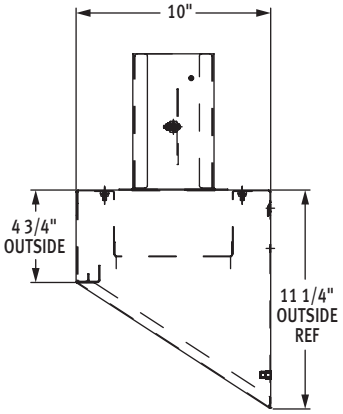

Short



Extended



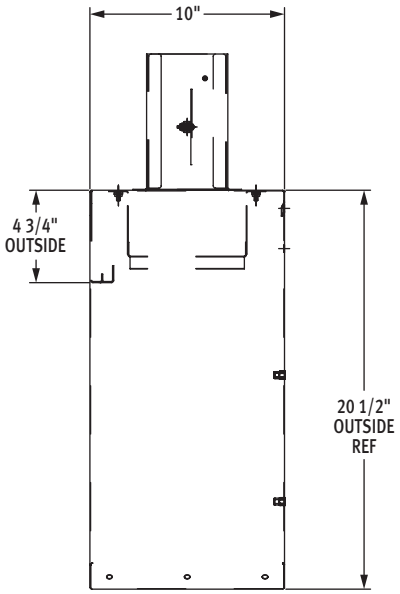


TABLE CONNECTION DETAILS


Tabling Connection: 44" inside tank (at table connection)

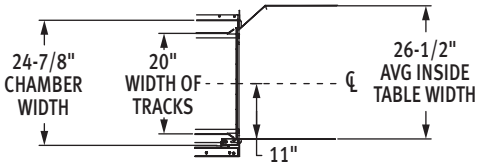

Suggested Track and Table Layout

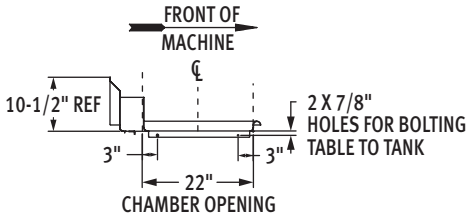

View Showing Hole Locations in Turned Down Portion of Table



Sectional View Showing Table Connections

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.

Commercial Kitchen Equipment Parts

Find more Hobart equipment resources at

parthubz.com/equipment/hobart

Need parts or service?

Call 833-700-8006

support@parthubz.com

parthubz.com