Commercial Kitchen Equipment Parts

HOBART CL66C-BAS

Hobart CL66C-BAS Specification Sheet

Provided by PartHubz

parthubz.com

833-700-8006 | support@parthubz.com

HOBART

Project _____


AIA #_____ SIS #_____

Item #_____ Quantity _____ C.S.I. Section 114000

COMMERCIAL DISHWASHERS

CL66C-BAS STEAM

High Temperature Rack Conveyor Dishwashing Machine

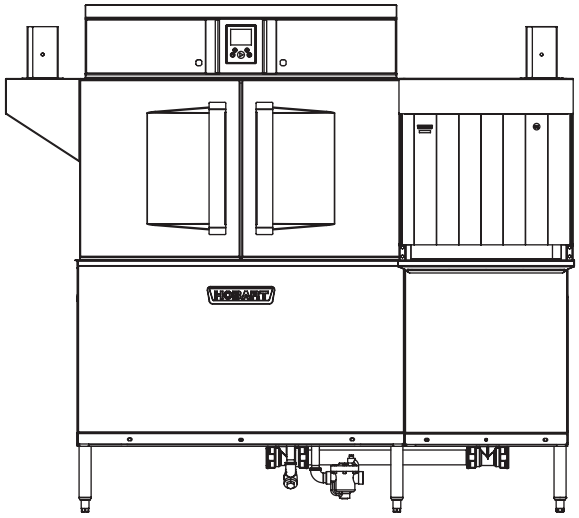

SPECIFIER STATEMENT

Specified dishwasher will be Hobart CL66C Base steam tank heat model. Features include 22" corner scrapper, Complete Delime™ with Delime Notification, Auto Dispensing and Booster Guard™, capless anti-clogging wash arms, 202 racks per hour, 90 gallons per hour pumped final rinse, insulated ergonomic cabinet style doors, touchscreen controls with WiFi connectivity, and NSF approved (pending) pot and pan cycle mode. The 19.5" standard chamber height will accommodate up to (6) standard sheet pans at a time on an open-end sheet pan rack.

STANDARD FEATURES

+ 90 gallons per hour pumped final rinse
+ 202 racks per hour
+ 22" corner scrapper
+ Complete Delime™ with Delime Notification, Auto Dispensing and Booster Guard™
+ Internal stainless steel pressure-less 18 kW booster heater (70°F rise)
  — Single point electrical connection standard
+ Capless, anti-clogging wash arms
+ Self-aligning wash manifolds
+ Large double door opening for ease of cleaning
+ 19.5" chamber height opening (accepts sheet pans)
+ Doors are insulated & hinged with door interlock switches
+ User-friendly smart touchscreen controls with diagnostics & troubleshooting
+ WiFi connectivity
+ SmartConnect app with machine status, temperature logs, error code reporting, and cost, consumption and usage analysis
+ Energy saver mode (programmable auto-shut down)
+ NSF rated configurable pot and pan cycle
+ Stainless steel self-draining pump and impeller
+ Sloping scrap screens and deep scrap baskets
+ Rapid return conveyor drive mechanism
+ Service diagnostics
+ Door actuated drain closure
+ Vent fan control
+ Convertible hot water or low temperature final rinse
+ Booster heater control


OPTIONS & ACCESSORIES (Available at extra cost)

❑ Standard, short and extended stainless steel vent hoods
❑ Direct drive unloader – adds 38" length; Reference spec F48944 for more details
❑ Side loader – SL23 adds 23" length, SL30 adds 30" length; Reference specs F40926 and F40927 for more details
❑ Blower-dryer – adds 33¼" to length; Reference spec F48945 (electric blower-dryer) and F48950 (steam blower-dryer) for more details (ships separate from dishmachine, contact Hobart Service for installation)
❑ Drain water tempering kit
❑ Flanged feet kit (requires three kits)
❑ Higher than standard chamber (24" opening)
❑ External #150 steam booster heater
❑ Table limit switch with 20' cable
❑ Correctional package (factory installed, contact Hobart for details)
❑ Water hammer arrester
❑ Factory-mounted circuit breakers (contact Hobart for details)


CL SERIES – CL66C-BAS STEAM

Approved by_____ Date_____ Approved by_____ Date_____


CL66C-BAS STEAM
High Temperature Rack Conveyor Dishwashing Machine

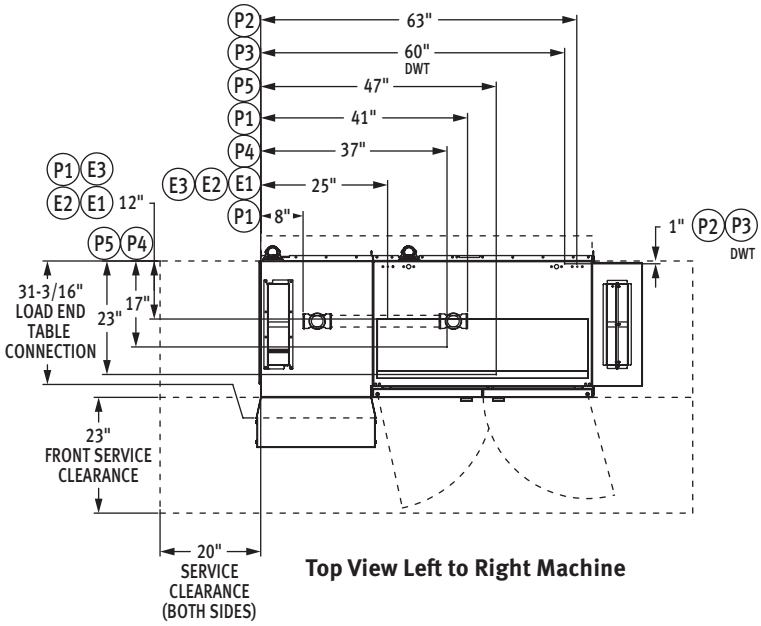


Top View Left to Right Machine

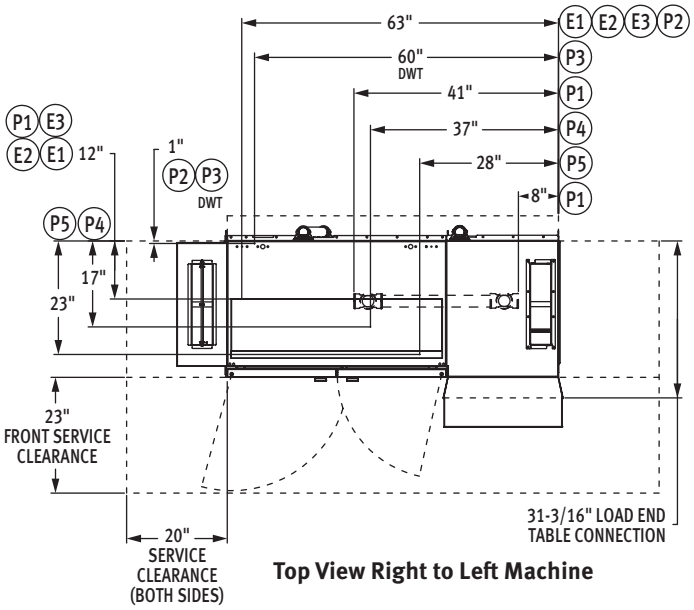


Top View Right to Left Machine

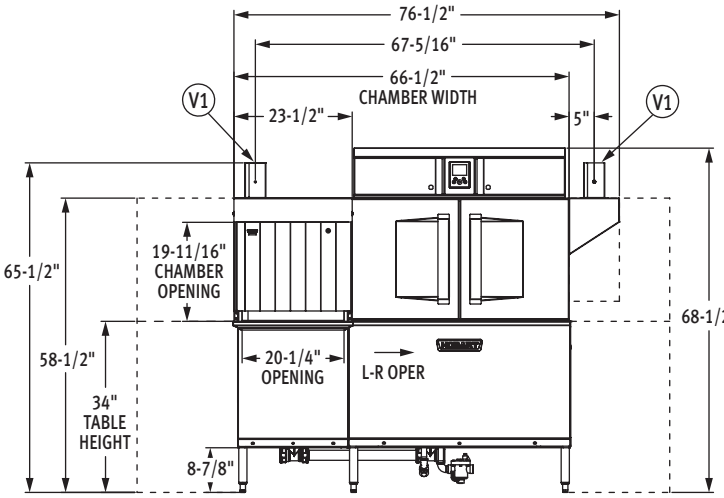

Front View Left to Right Machine

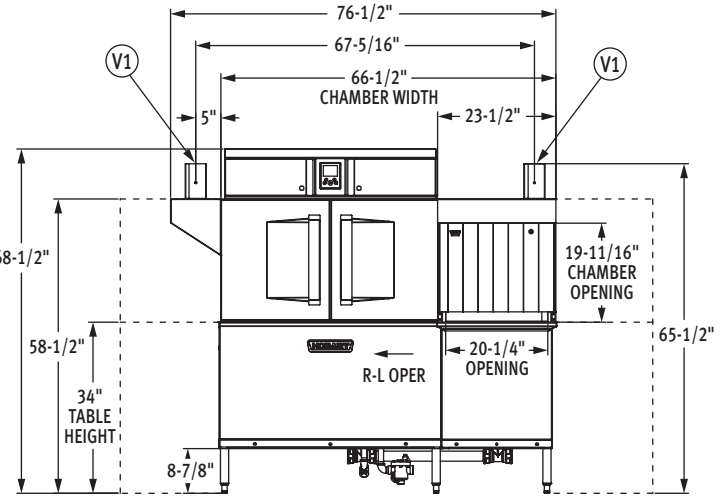

Front View Right to Left Machine

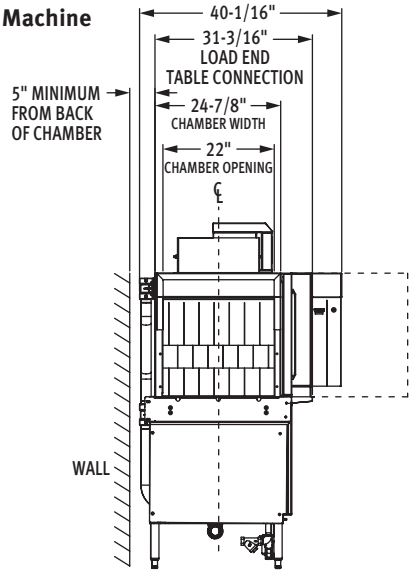

Side View

MODEL:
CL66C-BAS STEAM
L-R OPERATION
00-563924
REV A

MODEL:
CL66C-BAS STEAM
R-L OPERATION
00-563934
REV A

CAD and/or Revit Files Available

HOBART

CL66C-BAS STEAM
High Temperature Rack Conveyor Dishwashing Machine

LEGEND

Electrical Connections	
SINGLE POINT CONNECTION	
E1	Electric connection, single point: motors, controls, with 18 kW electric booster heater, 65" AFF.
DUAL POINT CONNECTION WITH BOOSTER	
E2	Electric connection: motors, 62" AFF.
E3	Electric connection: controls, 18kW booster heater, 65" AFF.
Plumbing Connections	
P1	Drain: 2" FPT, 7-3/8" AFF, two possible connections; may be drained to either side of drain housing, plug opposite side.
P2	Common hot water connection: 1/2" FPT, 12" AFF. See plumbing notes for required temperatures.
P3	Optional drain water tempering. Cold water connection: 1/2" FPT, 12" AFF, cold temperature 80°F maximum.
P4	Steam coils: 10 to 50 PSI flowing, 3/4" FPT, 6" AFF.
P5	Condensate return: a 10 PSI minimum differential pressure across the steam trap must be maintained. 3/4" FPT, 5" AFF, one connection (one bucket type trap furnished).
Vent Connections	
V1	Optional vent hoods: 4" x 16" vent stack with damper. Load end 200 CFM, unload end 400 CFM.

SPECIFICATIONS

Capacities

- Racks per Hour (NSF rated) 202
- Wash Tank (U.S. gallons) 23
- Corner Scrapper (U.S. gallons) 23
- Conveyor Speed (feet per minute) 5.6

Motor Horsepower

- Drive 1/6
- Wash 2
- Corner Scrapper 2
- Final Rinse 2/3

Water Consumption

- U.S. Gallons per Hour 90
- U.S. Gallons per Rack 0.45
- Peak Drain Flow (U.S. gallons per minute) 38

Heating

- Tank Heat, steam coils (pounds per hour) 65
- Electric Booster (built-in) (kW for 70°F rise) 18
- Electric Booster (field conversion) (kW for 40°F rise) 12

Venting

- Load End (minimum CFM) 200
- Unload End (minimum CFM) 400

Shipping Weight (approximate) . . . . . 855 lbs.

Crated Dimensions . . . . . 76"L x 38"W x 79"H

E1	Single Point Electrical Connection with Internal Booster	
Voltage	(E1) Motors, Controls, 18 kW Booster Heater	
	Rated Amps	Minimum Supply Circuit Ampacity/ Maximum Protective Device
208/60/3	70.7	90
240/60/3	62.2	80
480/60/3	33.2	40

E2 E3	Dual Point Electrical Connection with Internal Booster (Field Conversion Only)			
Voltage	(E2) Motors		(E3) Controls, 18 kW Booster Heater	
	Rated Amps	Minimum Supply Circuit Ampacity/ Maximum Protective Device	Rated Amps	Minimum Supply Circuit Ampacity/ Maximum Protective Device
208/60/3	12.2	15	58.5	70
240/60/3	10.4	15	51.8	70
480/60/3	6.0	15	27.2	35

WARNING: Electrical and grounding connections must comply with the applicable portions of the National Electrical Code and/or other local electrical codes.

CAUTION: Certain materials including silver, aluminum, and pewter are attacked by sodium hypochlorite (liquid bleach).

ATTN: Plumbing connections must comply with applicable sanitary, safety and plumbing codes.

CL66C-BAS STEAM
High Temperature Rack Conveyor Dishwashing Machine

Plumbing Notes: Water hammer arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.

Recommended water hardness to be 3 grains or less for best results.

Minimum incoming hot water temperatures:
110°F for 18kW internal booster
140°F for 12kW field converted internal booster
180°F without internal booster for high temperature sanitizing
130°F without internal booster for chemical sanitizing

Building flowing water pressure to dish machine is 20 to 65 PSI at the machine.

For convenience when cleaning, water tap should be installed near machine with heavy duty hose and squeeze valve.

For chemical sanitizing applications, feeder must be certified to NSF Standard 29.

Flowing steam pressures above 50 PSI must have a pressure regulator (by others) installed in the steam line.

Shut off valve must be supplied (by others) in the steam line to the dishwasher.

Tank heat, steam coils (pounds per hour) – 65.

Miscellaneous Notes: All dimensions taken from floor line may be increased approximately 3/4" or decreased 1/2".

For HTS, add 4-5/16" to all dimensions above table line.

For HTS, add 15 lbs. to the domestic shipping weight of each model.


Electrical Note: Dishmachine not provided with internal GFCI protection.

CL66C-BAS Steam Heat Dissipation		
Booster	BTU/HR.	
	Latent	Sensible
Without Booster	22,700	9,700
12kW Booster	30,800	13,200
18kW Booster	36,300	15,500


NOTE: 18kW Booster Heater field convertible to 12kW when 140°F incoming water provided. (Conversion instructions located in machine control box. Contact factory for 12kW booster amperage ratings.)

NOTE: Additional Voltages and Amperages are available, see document F48913.

TABLING - LOAD END

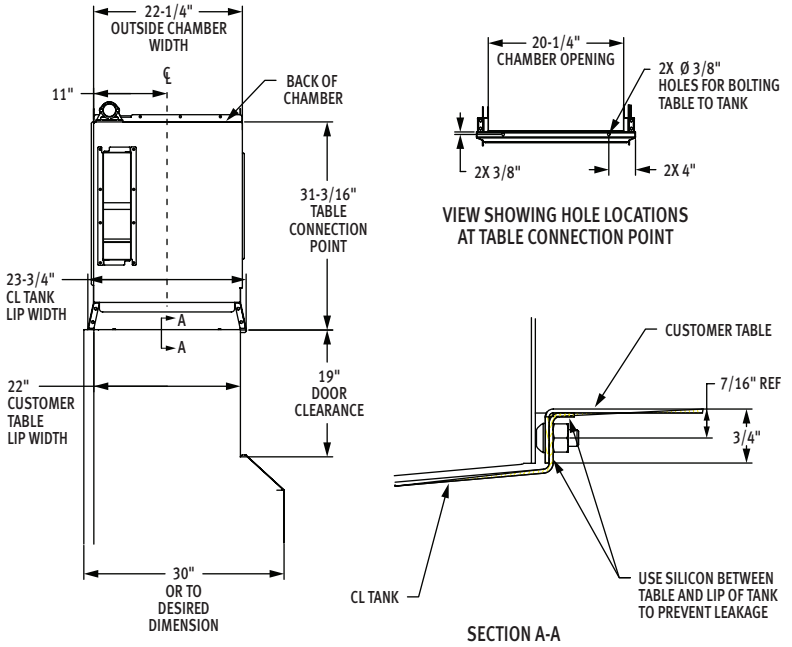

TABLING - UNLOAD END

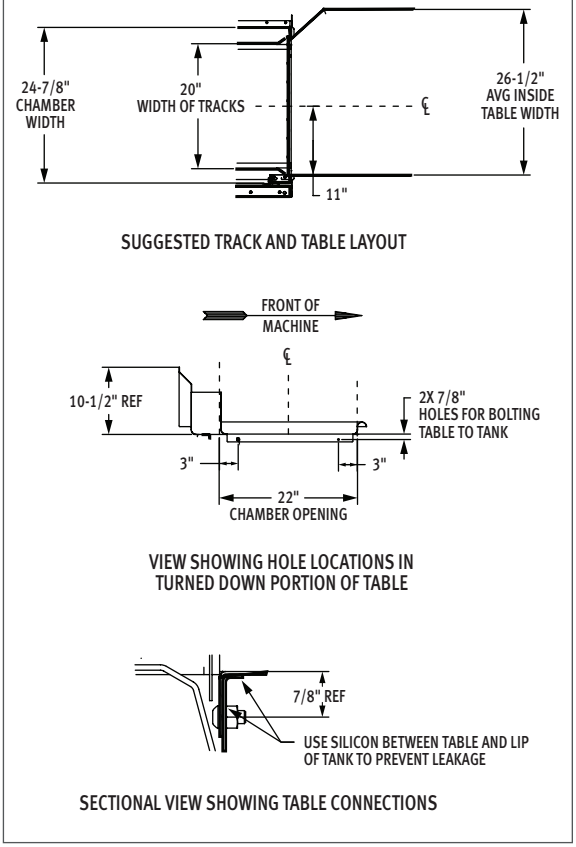

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.

Commercial Kitchen Equipment Parts

Find more Hobart equipment resources at

parthubz.com/equipment/hobart

Need parts or service?

Call 833-700-8006

support@parthubz.com

parthubz.com