Commercial Kitchen Equipment Parts

HOBART HTI

Hobart HTi document

Provided by PartHubz

parthubz.com

833-700-8006 | support@parthubz.com

Item # _____

Quantity _____

C.S.I. Section 11400

HOBART

701 S Ridge Avenue, Troy, OH 45374

1-888-4HOBART • www.hobartcorp.com

HTi SCALE

STANDARD FEATURES

- Video capability allowing independent videos to play on operator and customer displays simultaneously
- Intuitive and customizable graphical user interface
- Built-in wireless and wired Ethernet standard
- Best seller keys by scale/department
- Search database by description, key word or PLU number
- Swipe between three screens for operator ease of use
- Flashkeys can be laid out by categories or groups
- Product shelf life by days or hours
- Operator, product, and/or recipe notes
- Onscreen operator manual and tutorial videos
- COOL (country of origin labeling) can be created and modified on the scale
- Ability to require operator login
- Label graphics visible in supervisor mode
- Extensive scale backup in supervisor mode
- System can estimate number of additional records that may be added to the scale
- Default values for the four types of products; Fixed Weight, By Count, Random Weight, and Fluid Ounces
- UPC, EAN 13, EAN 128 Barcodes and GS1 DataBar
- Onscreen alphanumeric keyboard and keypad
- Cassette label loading system provides fast and efficient change of label stock.
- Meets federal labeling requirements
- Track operator changes
- Remotely access the scale using Hobart specific software

MODELS

Model	Feature	Operating System	Available Storage
❑ **HTi-LS**	No GCD	Linux	5 GB
❑ **HTiP-LS**	Printer only	Linux	5 GB
❑ **HTi-7LS**	7" GCD	Linux	5 GB

SOFTWARE

- Linux embedded Operating System
- Interfaces with scale management software such as:
  - Invatron's PLUM
  - ADC's Interscale
  - Genesis Software
  - Data GateWeigh
  - HCT
  - Hobart HTe Software
    - Content management
    - Label editing
    - Remote updates

Specifications, Details and Dimensions on Reverse Side.

HTi SCALE

HTi
SCALE

HOBART
701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

TECHNICAL SPECIFICATIONS

- 10.1" touch screen operator display - WSVGA TFT LCD, LED backlit, 5 wire resistive type
- 7" standard customer display – WSVGA TFT LCD, LED backlit
- ARM i.MX6 dual-core processor
- 1GB DDR3 RAM memory
- 8GB micro SD RAM Standard
- Both 802.3 10/100 Mbps Ethernet and 802.11 a/b/g/n wireless out of box
- Bluetooth 2.1 optional
- Two external USB 2.0 ports
- One 3.5mm Audio Jack
- High resolution thermal printhead for detailed graphics (store logos) and smaller bar codes – 203 dpi (8 dots per mm)
- Accepted labels:
  - 1.5" and 2.25" width
  - 1" to 9.5" length die cut labels
  - Continuous labels
  - Oval labels

SPECIFICATIONS

Platter: 14" wide x 15" deep

Weigher Capacity:
0 lb – 12 lb x 0.005
(0 - 6 kg x .002 kg)
12 lb – 30 lb x 0.01
(0 - 15 kg x .005 kg)

Pricing Capacity: Up to 999.99 in steps of .01

Electrical: 100-240 volts, 50-60 Hz, single phase, 1.42 amps, 170 watts max. 9 foot standard cord cap with ground type plug furnished.

Media Support: MPEG4, AAC, AVC/H.264

Weights and Measures Certification:
- USA Certification – 13-101
- Canada Certification – AM-5927C

Environment: Operating temperature limits are 14°F (-10°C) to 104°F (40°C) ambient. Scale operates satisfactorily in relative humidity of 10 to 85%.

Shipping Weight: 34 lbs.

DETAILS AND DIMENSIONS

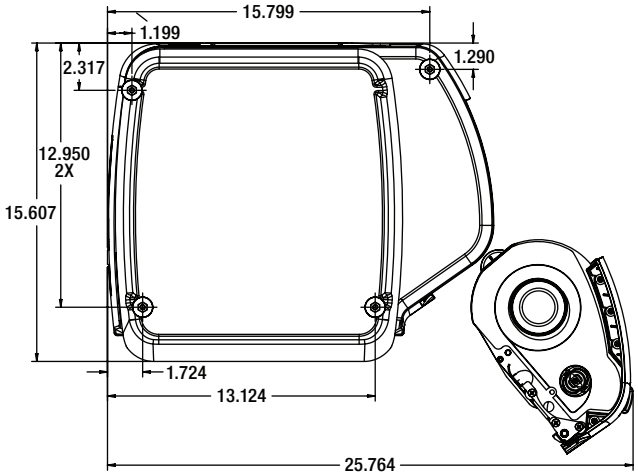

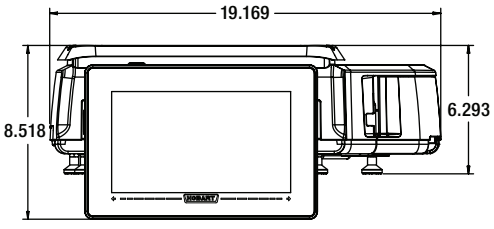

The below diagram reflects the customer facing panel for the HTi-7LS.

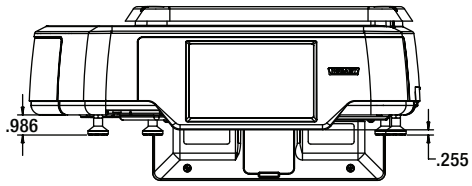

The below diagram reflects the customer facing panel for the HTi-LS and the HTiP-LS.

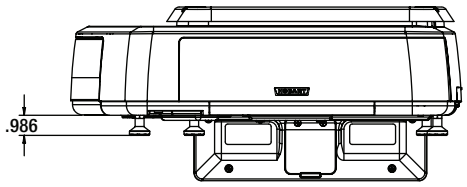

The customer facing panel for the HTi-LS and HTiP-LS is a solid black plate.

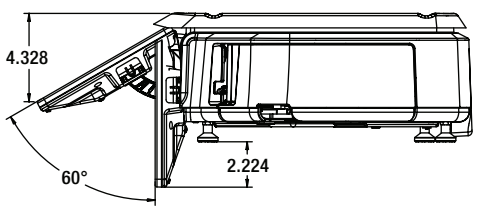

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.

F40348 (01/14)
LITHO IN U.S.A. (H-01) Printed On Recycled Paper

Commercial Kitchen Equipment Parts

Find more Hobart equipment resources at

parthubz.com/equipment/hobart

Need parts or service?

Call 833-700-8006

support@parthubz.com

parthubz.com