Commercial Kitchen Equipment Parts

METRO SUPER-ERECTA

Metro SUPER-ERECTA Specification Sheet

Provided by PartHubz

parthubz.com

833-700-8006 | support@parthubz.com

We put space to work.

Item # _____

Job _____

Super Erecta® Shelf
Wire Shelving

- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
- **Durable Construction:** Super Erecta shelves and posts are constructed of heavy-gauge carbon steel or Type 304 stainless steel.
- **Choice of Finishes:** Super Erecta Brite™ and chrome-plated for dry storage; Metroseal™ Epoxy (green or gray), and Type 304 stainless steel for corrosive environments; and attractive epoxy color options for merchandising applications.
- **Metroseal:** Proprietary rust-resistant finish is a durable epoxy coating over a protective zinc substrate. Metroseal contains Microban® antimicrobial product protection which continuously fights the growth of bacteria, mold, and mildew that cause stains and odors. 12-year limited warranty against rust and corrosion.
- **Versatile:** Super Erecta® Shelf wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Secure Assembly:** SiteSelect® Posts have a double groove visual guide feature every 8" (203mm), circular grooves at 1" (25mm) increments, and are numbered at 2" (50mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides This open construction allows maximum use of storage cube.
- **Adjustable Feet:** Bolt levelers compensate for surface irregularities.

Note: Stainless stationary posts are equipped with stainless steel leveling feet.

Super Erecta Chrome Wire

Super Erecta with Metroseal

Gray Metroseal Epoxy Finish with Microban

Green Metroseal Epoxy Finish with Microban

InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705

Product Information. U.S. and Canada: 1.800.992.1776
Outside U.S. and Canada: www.metro.com/contactus

L02-006e
Printed in U.S.A. 6/20

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2020 InterMetro Industries Corp.

Wire Shelves

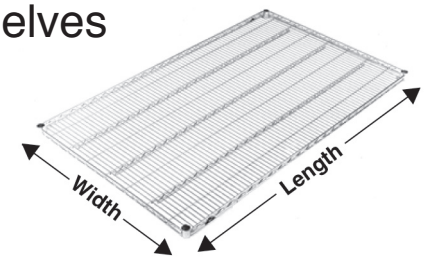

Aluminum Split Sleeve

- See spec sheet 10.14 for epoxy color options.
- Plastic split sleeves are included with each shelf Replacements are available: Cat. No. **9985** (bag of 4)
- Aluminum split sleeves are recommended for abusive mobile applications. Sleeves with stainless C-rings must be used for cart wash applications (exceeding 200°F/93°C) and for all autoclave applications.
  Cat. No. **9986Z** (bag of 4 with zinc C-rings)
  Cat. No. **9986S** (bag of 4 with stainless steel C-rings)
- Weight capacity (evenly distributed) per shelf
  800 lbs. (363kg) for lengths of 18" to 48" (457 to 1219mm)
  600 lbs. (272kg) for lengths of 54" (1370mm) or longer
- Weight capacity (evenly distributed) per unit.
  Stationary shelving units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907kg). Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453kg) total. Consult the Metro catalog for caster load ratings.

Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Metroseal Green (K3) with Microban	Cat. No. Metroseal Gray (K4) with Microban	Cat. No. Stainless	Nominal Width/Length (in.)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)
1424BR	**1424NC**	**1424NK3**	**1424NK4**	**1424NS**	14x24	355x610	5.3	2.4
1430BR	**1430NC**	**1430NK3**	**1430NK4**	**1430NS**	14x30	355x760	6.3	2.8
1436BR	**1436NC**	**1436NK3**	**1436NK4**	**1436NS**	14x36	355x914	7.5	3.4
1442BR	**1442NC**	**1442NK3**	**1442NK4**	**1442NS**	14x42	355x1066	8.3	3.8
1448BR	**1448NC**	**1448NK3**	**1448NK4**	**1448NS**	14x48	355x1219	9.4	4.3
1460BR	**1460NC**	**1460NK3**	**1460NK4**	**1460NS**	14x60	355x1524	11.8	5.4
1472BR	**1472NC**	**1472NK3**	**1472NK4**	**1472NS**	14x72	355x1829	14.4	6.5
-	**1818NC**	**1818NK3**	**1818NK4**	**-**	18x18	457x457	5.3	2.4
1824BR	**1824NC**	**1824NK3**	**1824NK4**	**1824NS**	18x24	457x610	6.1	2.7
1830BR	**1830NC**	**1830NK3**	**1830NK4**	**1830NS**	18x30	457x760	7.1	3.2
1836BR	**1836NC**	**1836NK3**	**1836NK4**	**1836NS**	18x36	457x914	8.2	3.7
1842BR	**1842NC**	**1842NK3**	**1842NK4**	**1842NS**	18x42	457x1066	9.3	4.2
1848BR	**1848NC**	**1848NK3**	**1848NK4**	**1848NS**	18x48	457x1219	10.7	4.9
1854BR	**1854NC**	**1854NK3**	**1854NK4**	**1854NS**	18x54	457x1370	11.9	5.4
1860BR	**1860NC**	**1860NK3**	**1860NK4**	**1860NS**	18x60	457x1524	13.4	6.1
1872BR	**1872NC**	**1872NK3**	**1872NK4**	**1872NS**	18x72	457x1829	14.6	6.6
2124BR	**2124NC**	**2124NK3**	**2124NK4**	**2124NS**	21x24	530x610	10.1	4.6
2130BR	**2130NC**	**2130NK3**	**2130NK4**	**2130NS**	21x30	530x760	10.5	4.8
2136BR	**2136NC**	**2136NK3**	**2136NK4**	**2136NS**	21x36	530x914	10.7	4.9
2142BR	**2142NC**	**2142NK3**	**2142NK4**	**2142NS**	21x42	530x1066	11.5	5.2
2148BR	**2148NC**	**2148NK3**	**2148NK4**	**2148NS**	21x48	530x1219	11.9	5.4
2154BR	**2154NC**	**2154NK3**	**2154NK4**	**2154NS**	21x54	530x1370	12.9	5.8
2160BR	**2160NC**	**2160NK3**	**2160NK4**	**2160NS**	21x60	530x1524	13.4	6.1
2172BR	**2172NC**	**2172NK3**	**2172NK4**	**2172NS**	21x72	530x1829	14.4	6.5
2424BR	**2424NC**	**2424NK3**	**2424NK4**	**2424NS**	24x24	610x610	6.5	3.0
2430BR	**2430NC**	**2430NK3**	**2430NK4**	**2430NS**	24x30	610x760	8.3	3.8
2436BR	**2436NC**	**2436NK3**	**2436NK4**	**2436NS**	24x36	610x914	10.1	4.6
2442BR	**2442NC**	**2442NK3**	**2442NK4**	**2442NS**	24x42	610x1066	11.9	5.4
2448BR	**2448NC**	**2448NK3**	**2448NK4**	**2448NS**	24x48	610x1219	14.2	6.4
2454BR	**2454NC**	**2454NK3**	**2454NK4**	**2454NS**	24x54	610x1370	16.1	7.3
2460BR	**2460NC**	**2460NK3**	**2460NK4**	**2460NS**	24x60	610x1524	18.0	8.2
2472BR	**2472NC**	**2472NK3**	**2472NK4**	**2472NS**	24x72	610x1829	21.4	9.7

Note: The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.

Note: The following restrictions apply to shelving units that utilize 14" (355mm) wide shelves:
Free-standing units: Units taller than 63" (1600mm) must be properly fastened to the floor or wall using Metro foot plates or wall brackets.
Mobile units: maximum allowable post height is 54" (1370mm).

SiteSelect® Posts

SiteSelect Posts feature double grooves every 8" (203mm) to aid assembly.

Stationary Posts - Equipped with a leveling bolt to account for uneven floors.

- Height includes leveling bolt (completely tightened) and post cap. Leveling bolt can be adjusted 0.5" (13mm).
- Foot plates may be ordered separately and installed in place of leveling foot.
- Replacement leveling bolts: Zinc Cat. No. **RPF04-004**, Stainless Steel Cat. No. **RPF04-004C**
- Replacement post cap for standard posts: Black Cat. No. **RPC06-035**

Cat. No. Chrome	Cat. No. Metroseal Green (K3) with Microban	Cat. No.. Metroseal Gray (K4) with Microban	Cat. No. Stainless Steel	Actual Height (in.)	Actual Height (mm)	Approx Pkd. Wt. (lbs.)	Approx Pkd. Wt. (kg)
7P	**7PK3**	**7PK4**	**-**	7.375	187	0.5	0.3
13P	**13PK3**	**13PK4**	**13PS**	14.375	365	1	0.5
27P	**27PK3**	**27PK4**	**27PS**	28.375	720	1.75	0.75
33P	**33PK3**	**33PK4**	**33PS**	34.375	873	2	0.9
54P	**54PK3**	**54PK4**	**54PS**	54.4375	1382	3	1.4
63P	**63PK3**	**63PK4**	**63PS**	62.4375	1585	3.5	1.6
74P	**74PK3**	**74PK4**	**74PS**	74.5	1892	4	1.8
86P	**86PK3**	**86PK4**	**86PS**	86.5	2197	5	2.3
***96P**	**-**	**-**	**-**	96.5	2450	5.5	2.5

*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.

Stationary Post

Mobile Posts (For use with Stem Casters)

- Height includes post cap.

Cat. No. Chrome	Cat. No. Metroseal Green (K3) with Microban	Cat. No. Metroseal Gray (K4) with Microban	Cat. No. Stainless Steel	Actual Height (in.)	Actual Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)
13UP	**13UPK3**	**13UPK4**	**13UPS**	13.75	349	1	0.5
27UP	**27UPK3**	**27UPK4**	**27UPS**	27.75	704	1.75	0.75
33UP	**33UPK3**	**33UPK4**	**33UPS**	33.75	857	2	0.9
54UP	**54UPK3**	**54UPK4**	**54UPS**	53.8125	1366	3	1.4
63UP	**63UPK3**	**63UPK4**	**63UPS**	61.8125	1570	3.5	1.6
-	**70UPK3**	**70UPK4**	**-**	69.75	1771	3.75	1.7
74UP	**74UPK3**	**74UPK4**	**74UPS**	73.875	1876	4	1.8
86UP	**86UPK3**	**86UPK4**	**86UPS**	85.875	2181	4.5	2.0

Post for Stem Caster

Special Length Posts

Cut posts are available. Consult your Metro representative for more information.

Staked Posts (For use with Truck Dollies)

- Each post connects to the truck dolly through the stem receptacle. The stem receptacle is staked into the bottom of the post to ensure a durable connection in abusive mobile applications. Each includes a leveling/connecting bolt.

Cat. No. Chrome	Cat. No. Stainless Steel	Actual Height (in.)	Actual Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)
54P-STKD	**54PS-STKD**	54.4375	1382	3	1.4
63P-STKD	**63PS-STKD**	62.4375	1585	3.5	1.6
74P-STKD	**74PS-STKD**	74.5	1892	4	1.8

Staked Post

Swaged Posts (For use with Stem Casters in Cart Wash Applications)

- Each post has an aluminum cap swaged into the top of the post.

Cat. No. Stainless Steel	Actual Height (in.)	Actual Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)
33UPS-SW	33.75	857	2	.9
54UPS-SW	53.8125	1366	3	1.4
63UPS-SW	61.8125	1570	3.5	1.6

Swaged Post

Job _____

Super Erecta Shelf®
Wire Shelving

METRO®
We put space to work.

Super Wide Shelving

- **High-density Storage:** Super Wide shelves have a greater storage area for holding large quantities of supplies, especially large, bulky objects, providing maximum storage in minimum space.
- **Load Capacity (evenly distributed) per shelf:**
  Depths: 30" and 36" (760 and 914mm)
  800 lbs. (363kg) for lengths 48" (1219mm) or shorter.
  600 lbs. (272kg) for lengths 54" (1370mm) or longer.

Cat. No. Chrome	Cat. No. Metroseal Green (K3) with Microban	Cat. No.. Metroseal Gray (K4) with Microban	Cat. No. Stainless Steel	Nominal Width/Length (in.)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)
3036NC	**3036NK3**	**3036NK4**	**3036NS**	30x36	760x914	14.2	6.4
3048NC	**3048NK3**	**3048NK4**	**3048NS**	30x48	760x1219	17.7	8.0
3060NC	**3060NK3**	**3060NK4**	**3060NS**	30x60	760x1524	20.2	9.2
3072NC	**3072NK3**	**3072NK4**	**3072NS**	30x72	760x1829	22.7	10.3
3636NC	**3636NK3**	**-**	**3636NS**	36x36	910x914	16.7	7.6
3648NC	**3648NK3**	**-**	**3648NS**	36x48	910x1219	21.6	9.8
3660NC	**3660NK3**	**-**	**3660NS**	36x60	910x1524	26.4	12.0
3672NC	**3672NK3**	**-**	**3672NS**	36x72	910x1829	31.6	14.3

Note: The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.

Foot Plates

- Use to bolt units to the floor, or when a broader, more stable foot is desired. Foot plates also help to protect floors by distributing the point load of the shelving unit across a larger contact point.
- Foot plates (completely tightened) add .125" (3mm) to the specified heights of each stationary post on the table.
  Zinc Cat. No. **9993Z**
  Stainless Steel Cat. No. **9993S**

"S" Hook



- Used to add on shelving units with only two posts required. Order two per shelf level.
  Cat. No. **9995Z**

an Ali Group Company
The Spirit of Excellence

Commercial Kitchen Equipment Parts

Find more Metro equipment resources at

parthubz.com/equipment/metro

Need parts or service?

Call 833-700-8006

support@parthubz.com

parthubz.com