Commercial Kitchen Equipment Parts


VULCAN HART VC3ED

Wiring Diagram

Provided by PartHubz

parthubz.com

833-700-8006 | support@parthubz.com

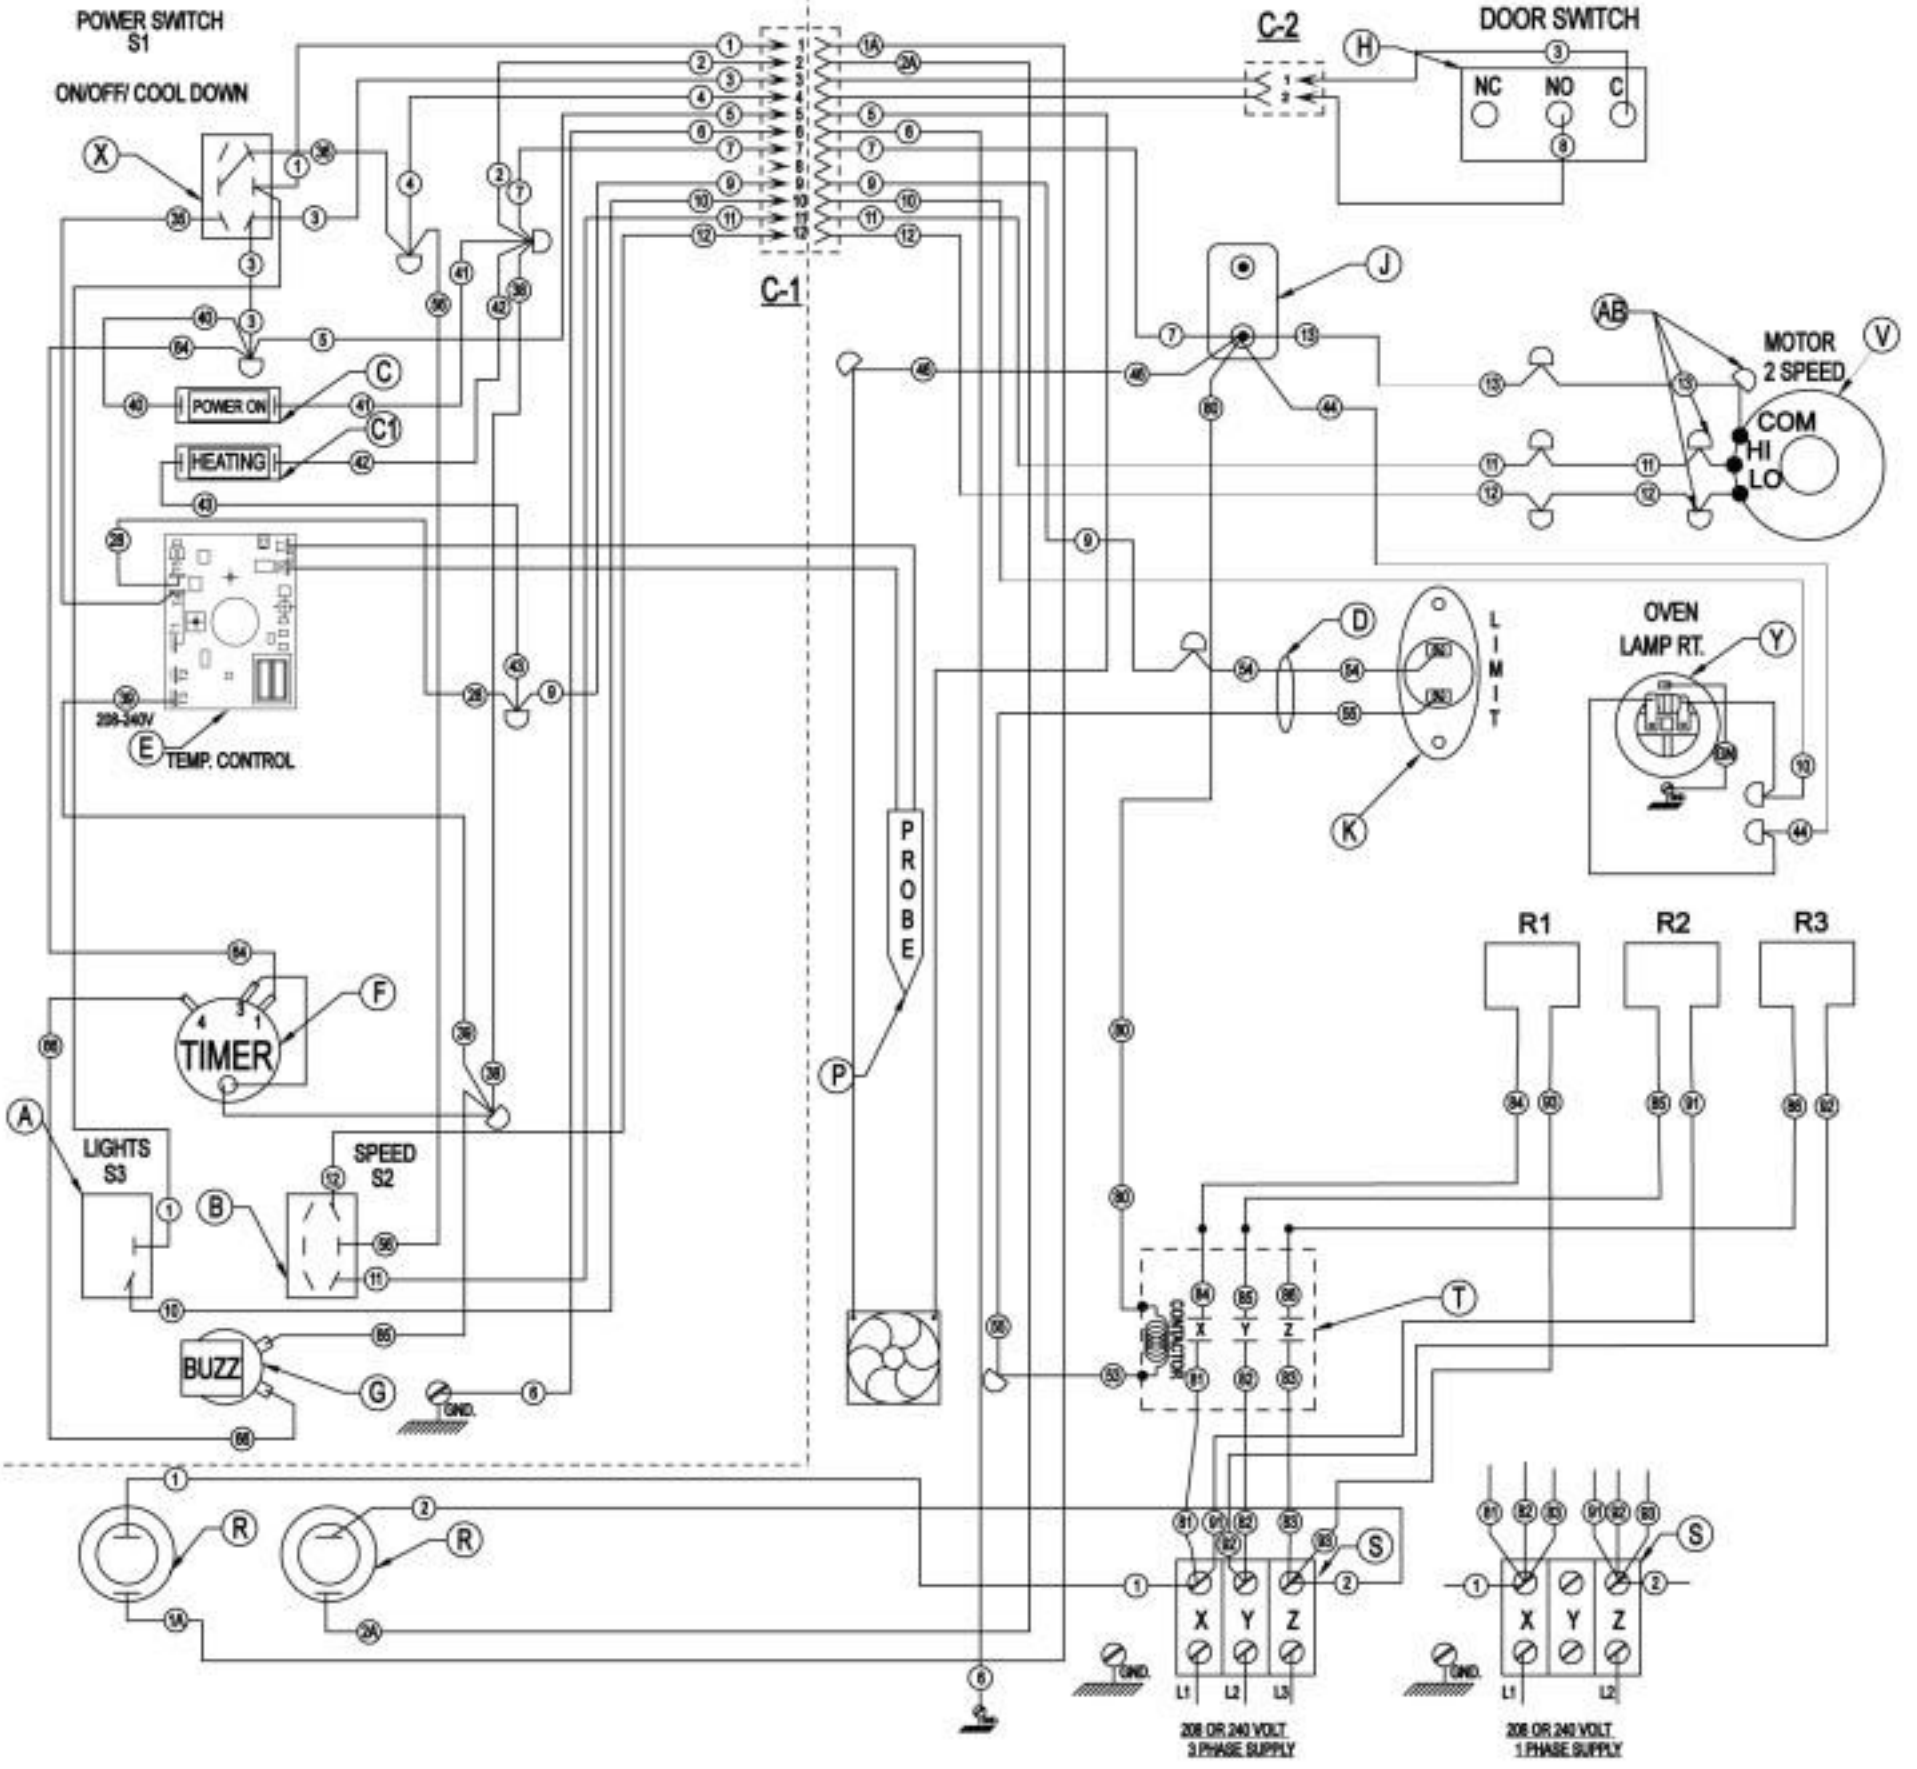

POWER SWITCH
S1
ON/OFF/ COOL DOWN
C-1
C-2
DOOR SWITCH
NC
NO
C
POWER ON
HEATING
TEMP. CONTROL
MOTOR
2 SPEED
COM
HI
LO
LIMIT
OVEN
LAMP RT.
PROBE
TIMER
LIGHTS
S3
SPEED
S2
BUZZ
GND.
R1
R2
R3
CONTACTOR
208 OR 240 VOLT.
3 PHASE SUPPLY
208 OR 240 VOLT.
1 PHASE SUPPLY


VC3ED X 208-240V.

USE FIELD WIRE SUITABLE FOR 90°C.

UNIT	TOTAL KW CONN.	3PHASE LOAD KW/PHASE		
		X-Y	Y-Z	X-Z
SINGLE	12.5	4.0	4.0	4.5
STACKED	25	8.0	8.0	9.0

	NOMINAL AMPS PER LINE							
	3 PHASE						1-PH	
	208V			240V			208	240
	X	Y	Z	X	Y	Z	XZ	XZ
SINGLE	35	33	35	33	29	33	60	52
STACKED	70	66	70	66	58	66	120	104

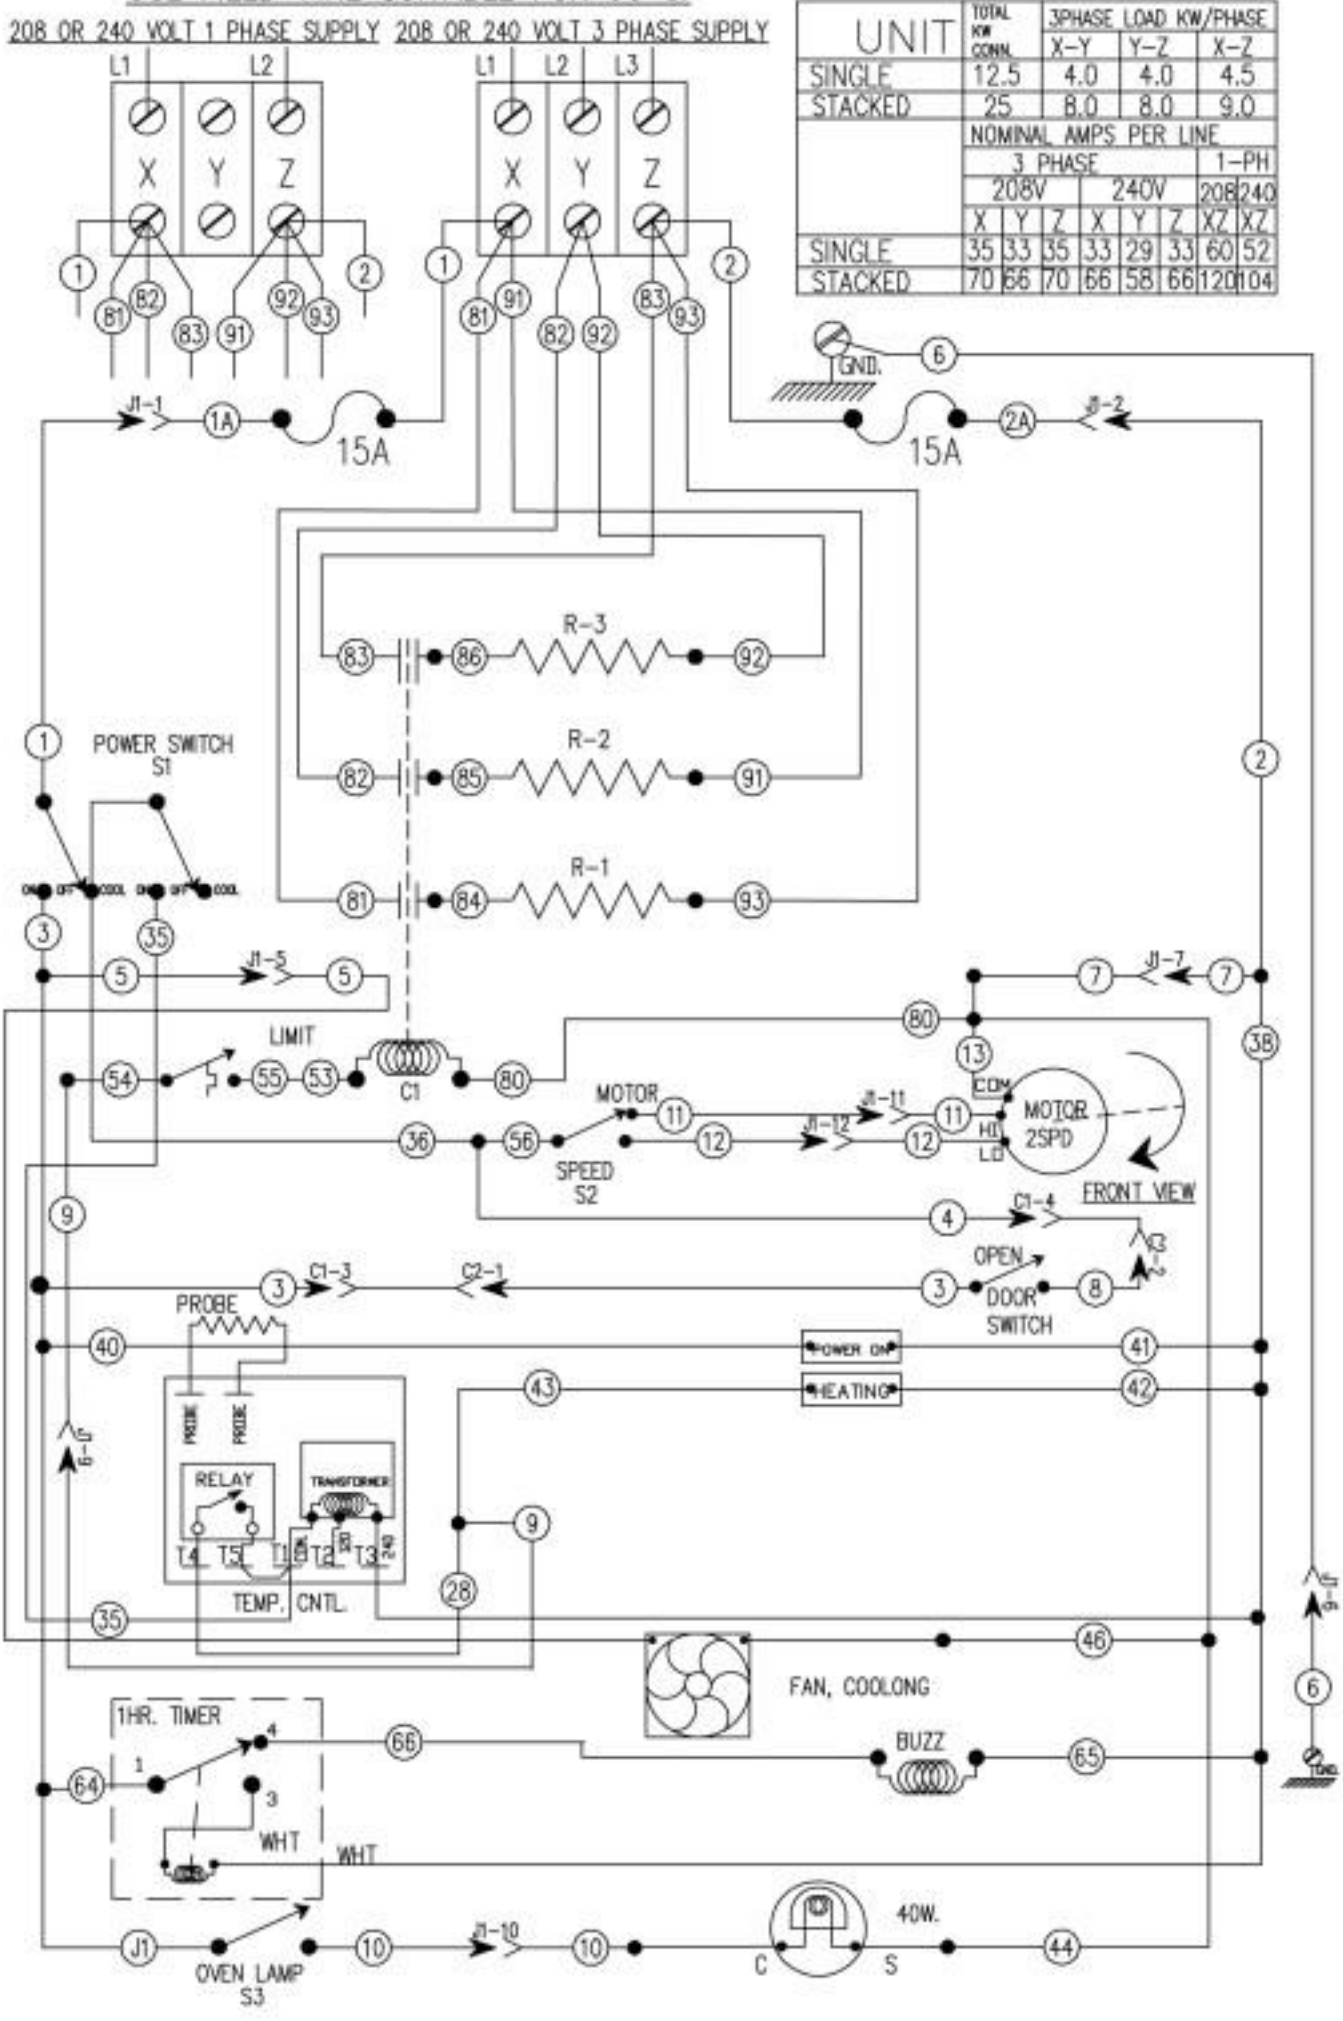


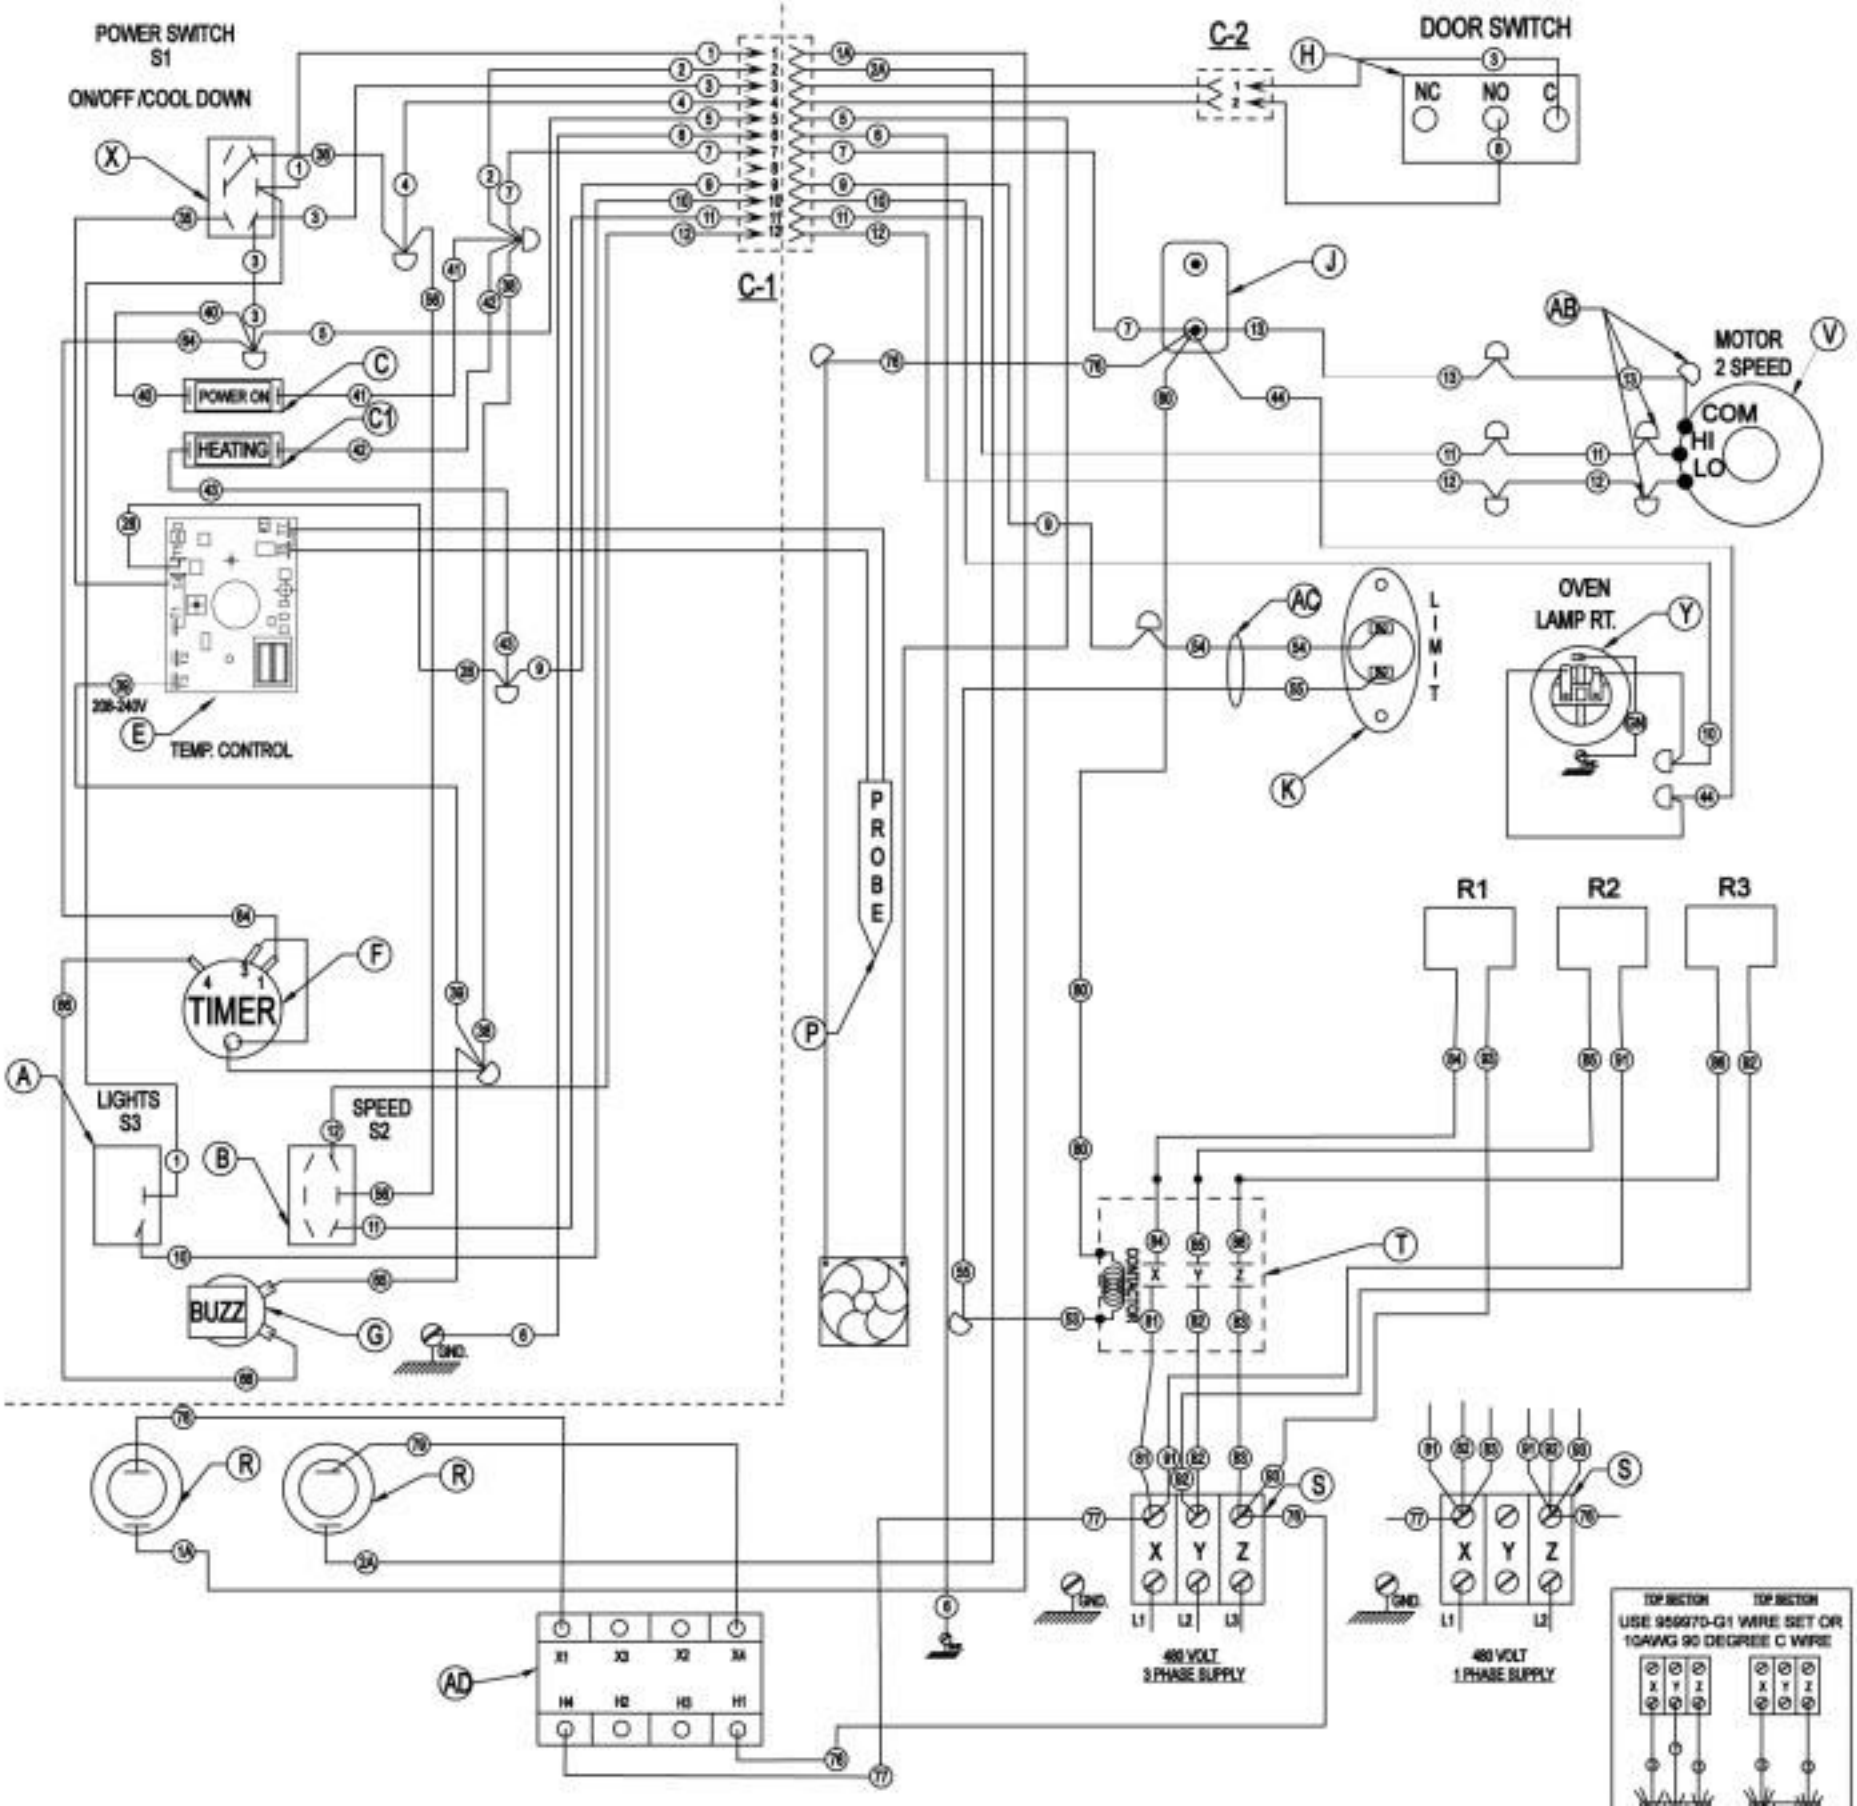
POWER SWITCH
S1
ON/OFF /COOL DOWN
C-1
C-2
DOOR SWITCH
NC
NO
C
POWER ON
HEATING
TEMP. CONTROL
220-240V
MOTOR
2 SPEED
COM
HI
LO
LIMIT
OVEN
LAMP RT.
PROBE
TIMER
LIGHTS
S3
SPEED
S2
BUZZ
GND.
R1
R2
R3
CONTACTOR
480 VOLT
3 PHASE SUPPLY
480 VOLT
1 PHASE SUPPLY
TOP SECTION
TOP SECTION
USE 959970-G1 WIRE SET OR
10AWG 90 DEGREE C WIRE

VC3ED X 480V.

USE FIELD WIRE SUITABLE FOR 90°C.

UNIT	TOTAL KW CONN.	3PHASE LOAD KW/PHASE X-Y	Y-Z	X-Z
SINGLE	12.5	4.0	4.0	4.5
STACKED	25	8.0	8.0	9.0
	NOMINAL AMPS PER LINE			
	3 PHASE			1-PH
	480 VOLT			480
	X	Y	Z	XZ
SINGLE	14.4	15.3	15.3	26
STACKED	28.8	30.6	30.6	52

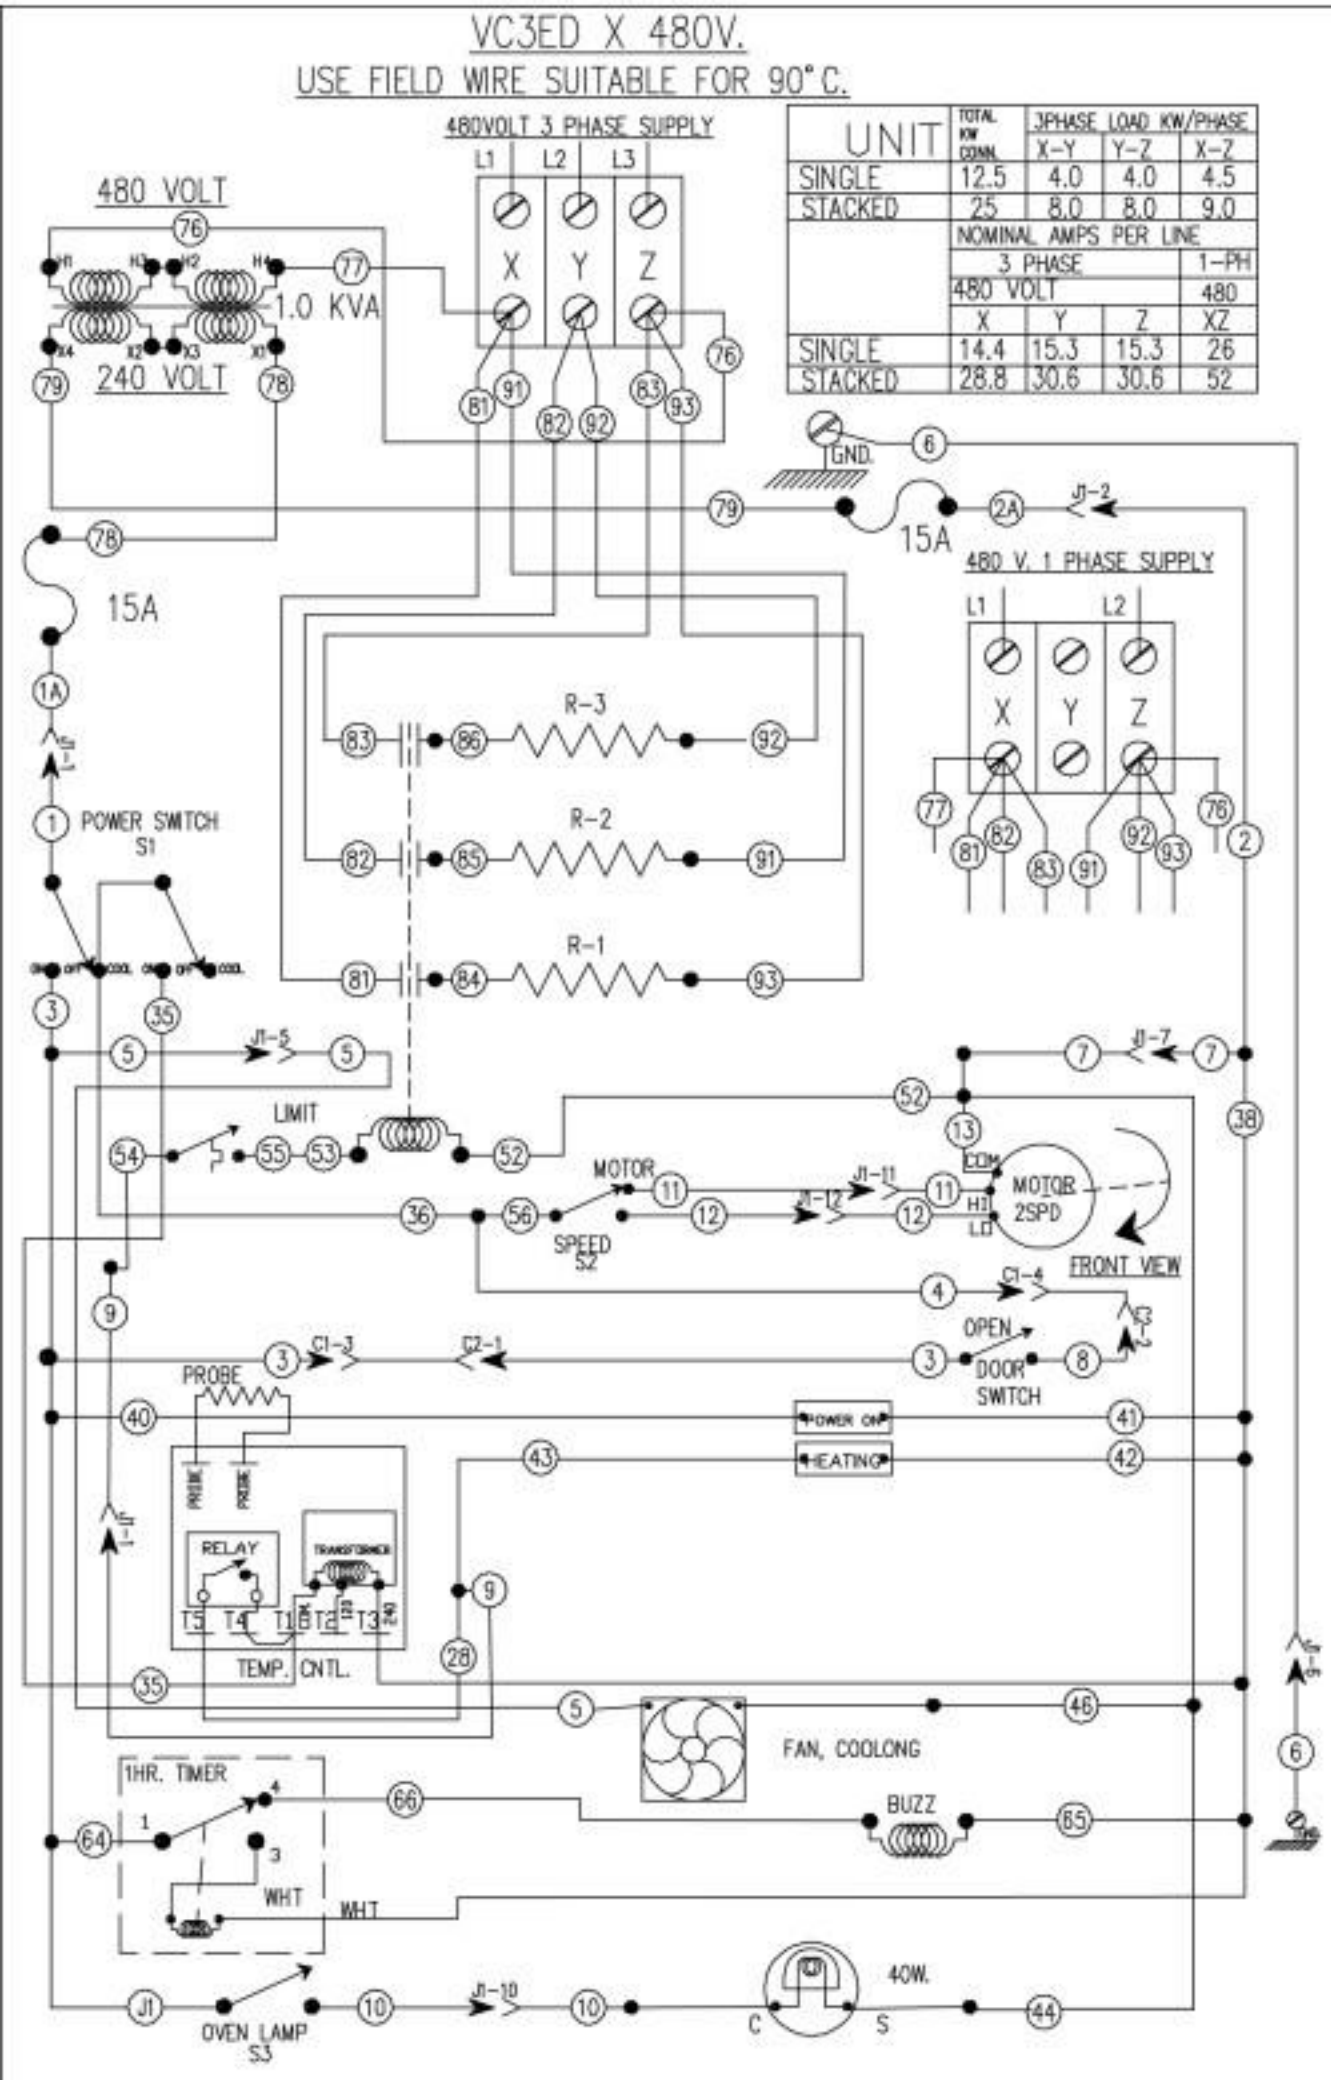

Commercial Kitchen Equipment Parts

Find more Vulcan Hart equipment resources at

parthubz.com/equipment/vulcan-hart

Need parts or service?

Call 833-700-8006

support@parthubz.com

parthubz.com