



Commercial Kitchen Equipment Parts

PITCO SE18

Pitco SE18 document

Provided by PartHubz

parthubz.com

833-700-8006 | support@parthubz.com



Model KF-SE18
Electric Open Fryer



Model KF-SE18 Electric Open Fryer



APPLICATION

The KF-SE18 fryer design offers higher production with increased electric efficiency. The fryer is ideal for cooking "chicken on the bone" (COB), strips and filets, and all International YUM freezer to fryer products.

SHORT FORM DESCRIPTION

Fryer, Electric Open Fryer

KF-SE18 (voltage, phase), Line up SE18 with (select FAST computer type), fixed heating elements, mercury free heating contactors, (select safety interlock type), SS sides & front, tray/bun pan hooks, casters rear/legs front. Accessories include: (1) brush, (1) clean out rod, (1) removable basket hanger. (1) (Select Tank Support).

STANDARD FRYER FEATURES

- Stainless Steel Fry Pot
- Fixed heating elements
- 1 1/4" (3.2 cm) Full port drain valve
- Cabinet- stainless steel sides, front, splash back
- Mercury free heating contactors
- High temperature limit switch
- Heavy duty 3/16" (.48 cm) door hinges
- 10" (25.4 cm) fixed casters rear and legs front
- Tray/Bun Pan Hooks

ACCESSORY ITEMS SHIPPED WITH UNIT

- 1 - Fry pot cleaning brush
- 1 - Fry pot drain clean out rod
- 1 - Removable basket hanger
- 1 - Tank Support (Select One)
 - ☐ Element Screen ☐ Element Rack

OPTIONS AVAILABLE (At Additional Cost)

- Computer Type
 - ☐ VC210 FAST ☐ Computer Ready
- Safety Interlock Type
 - ☐ Drain valve interlock ☐ Float switch ☐ Both types
- ☐ Fry pot cover




Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 509 Route 3A, Bow, NH 03304

603-225-6684 • FAX: 603-225-8497 • www.pitco.com

L10-393 Rev 0 10/11

Printed in the USA

Model KF-SE18 Electric Open Fryer

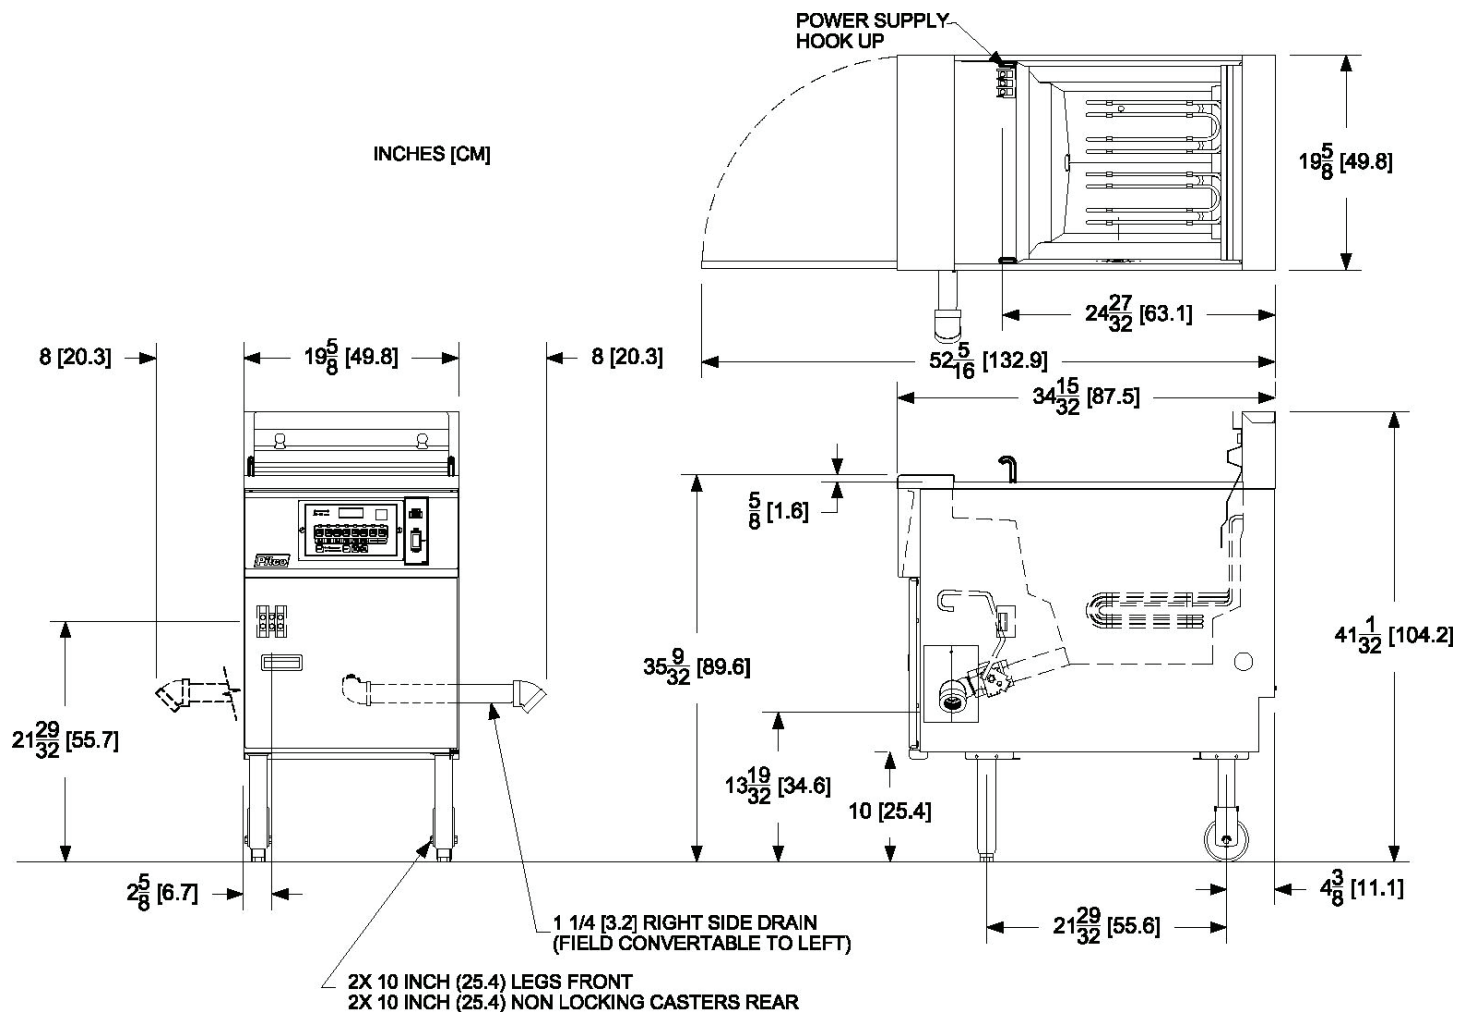

INDIVIDUAL FRYER SPECIFICATIONS																			
Model		KW	Frying Area							Cook Depth							Oil Capacity		
KF-SE18		17	18 x 18 in (45.7 x 45.7 cm)							3-1/4 - 5 in (8.3 - 12.7cm)							70-90 Lbs (32 - 42 kg)		
SHIPPING WEIGHT (Approximate)																			
Shipping Weight			Shipping Crate Size H x W x L (Approximate)														Shipping Cube		
226 Lbs (102.5 kg)			45 x 23 x 38 in (114.3 x 58.4 x 96.5 cm)														23ft ³ (0.6 m ³)		
ELECTRICAL REQUIREMENTS		Nominal Amps Per Line (50/60 HZ)																	
		Single Phase (2 wire + ground)							3 Phase (3 wire + ground)							3 Phase "Y" (4 wire + ground)			
Model	KW	200	208	220	230	240	440	480	200	208	220	230	240	440	480	346/200	380/220	400/230	415/240
KF-SE18	17	79	82	78	74	71	33	36	46	48	45	43	41	19	21	27	26	25	24
Notes: 1. 200V Units will operate at 92% of rated power. 2. 440V Units will operate at 84% of rated power.																			
CLEARANCES																			
Front min.		Floor min.							Combustible material										
30" (76.2 cm)		6" (15.25 cm)							Sides min.		6" (15.2 cm)					Rear min.		6" (15.2 cm)	



Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 509 Route 3A, Bow, NH 03304

603-225-6684 • FAX: 603-225-8497 • www.pitco.com

L10-393 Rev 0 10/11

Printed in the USA



Commercial Kitchen Equipment Parts

Find more Pitco equipment resources at

parthubz.com/equipment/pitco

Need parts or service?

Call 833-700-8006

support@parthubz.com

parthubz.com